

The logo for Antari FOG MACHINE. The word "Antari" is written in a bold, red, sans-serif font with a registered trademark symbol (®) to its upper right. Above the letter 'i' in "Antari", there are three thin, red diagonal lines. Below "Antari", the words "FOG MACHINE" are written in a smaller, white, sans-serif font, centered within a solid red rectangular background.

Antari[®]
FOG MACHINE

2023 PRODUCT GUIDE

A vertical photograph of a dense forest of tall evergreen trees, likely spruce or fir, with a few dead, bleached trees interspersed. The forest is reflected in a calm body of water in the foreground. A semi-transparent dark green horizontal band is overlaid across the middle of the image, containing white text.

All of our effects are inspired by **Mother Nature.**
All of our machines are **Designed to Respect her.**

COMPANY PROFILE

Since 1984, Antari has been a leading global manufacturer, specializing in atmospheric special effects, like fog, haze, and snow for a wide range of international live and broadcast venues, festivals, corporate events, theatre, concerts, clubs, theme parks, archtainment, and houses of worship. Antari has always pursued the perfect fog, with some of the most stringent quality control standards in the entertainment production industry.

Antari's R&D expertise, including an in-house team of engineers and designers, along with modern production facilities, and strict attention to detail allows Antari to continually create new and exciting cutting-edge special effects, while always being mindful of environmental concerns to also create the safest and most energy-efficient products possible.

Antari products are also widely used in residential/commercial security, industrial humidity control, horticultural uses, and leak detection.

Antari, an innovative leader in entertainment special effects, exceeding customer expectations since 1984.

NEW PRODUCTS

WIND

01



AF-6

SNOW

02



S-600

FOG MACHINE

FOGGER

03



W-530D | W-515D

04



W-510 | W-508

05



M-11 | M-8

06



M-10 | M-5

07



Z-3000II | Z-1500II

08



Z-1200II | Z-1000II

09



Z-800II

JET

10



M-9

11



M-7X | Z-1520

12



M-715 | Z-1020

WEATHERPROOFED

13



IP-1500

BATTERY POWERED

14



MB-1 | MB-20X

SMAZE

15



F-7

FAZER

16



F-4 | F-2

17



F-1

18



Z-390 | Z-350

CO²

19



CH-1

HAZER

20



HZ-1000

21



HZ-500 | HZ-400

22



HZ-350 | HZ-100


LOW FOG

23



DNG-250

24



DNG-100 | ICE-101

SPECIAL EFFECTS

SNOW

26



S-500

27



SW-300 | SW-250

28



S-200X | S-100X

BUBBLE

29



B-200

30



B-100 | W-101

WIND

31



AF-5X

32



AF-4 | AF-3

FIRE TRAINING

33



FT-200

34



FT-100 | FT-20X

ACCESSORIES | FLUID

36



LCU-1S | LCU-2S

37

CONTROL MODULE

39

REMOTE

45

HANGING BRACKET SETS

46

ADAPTOR

47

FLIGHT CASE

48

FLUID

55

ACCESSORIES LIST

DARK FX

58



DARK FX STRIP 1020

59



DARK FX WASH 2000IP

60



DARK FX WASH 2000

61



DARK FX SPOT 670

62



DARK FX STRIP 510

63



DARK FX STRIP 510IP

64



DARK FX SPOT 510IP

65



DARK FX SPOT 1750

66



DARK FX DRIVE 4 MKII

67 ANTARI WATCH

69 SPEC CHART

New Product

FAN



AF-6



- Input voltage	US model : AC 100-120V, 50/60Hz 2.08A EU model : AC 220-240V, 50/60Hz 1.04A	- DMX channels	1 channel
- Rated power	250 W	- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)	- Optional accessories	WTR-20 Wireless Remote SC-2 Cable Remote
- Air flow	2583 CFM (AC 120V/60Hz) 2550 CFM (AC 240V/60Hz)	- Dimension	L461.2 W596 H629.6 mm (L18.2 W23.5 H24.8 inch)
- Fan speed	1550 rpm (AC 120V/60Hz) 1530 rpm (AC 240V/60Hz)	- Weight	22.3 kg (49.1 lbs)
- Control	Manual, Timer, DMX512 Wireless(Optional)		



S-600



- Input voltage	US model : AC 100-120V, 50 / 60HZ 10A EU model : AC 220-240V, 50 / 60Hz 5A	- Connection	Neutrik Powercon(Power) XLR 5-pin (DMX)
- Rated power	1200W	- Included accessories	W-2 Wireless Radio Transmitter 5-Meter Fluid Tube with Filter Hanging Bracket
- Fluid consumption	400 ml/min	- Optional accessories	S-600-TKC 20 Liter Tank Cap assembly w/5M tube TIMO-WTR-90 Wireless DMX SC-4 Cable Remote S-600-BH Bottle Holder (For 5-Liter Bottle, Bottle is not included)
- Compatible fluid	Antari SL-N Snow & Foam Fluid (New Formula) Antari SL-AN Premium Snow Fluid (New Formula) Antari SL-H Super Dry Snow Fluid Antari SL-C Anti-Freezing Snow Fluid Antari SL-UV UV Snow Fluid	- Dimensions	L461.2 W 596 H 629,6 mm (L18.16 W 23.47 H 24.79 inch)
- Ambient temp.range	5°C - 40°C (41°F - 104°F)	- Weight	24 kg (52.9 lbs)
- Control	Manual / Timer / DMX 512 / Wireless Wireless DMX (Optional), Cable Remote (Optional)		
- DMX channels	3 channels		




W-530D

W-515D

- Input voltage	-	US model : AC 100-120 V, 50/60 Hz 9A
	EU model : AC 220-240V, 50/60Hz 4.5A	EU model : AC 220-240 V, 50/60 Hz 4.5A
- Rated power	2570W	1500W
- Warm-up time	12 minutes (approx.)	10 minutes (approx.)
- Fluid consumption	160 ml/min	100 ml/min
- Fluid tank capacity	6 Liters (1.59 gallon)	6 Liters (1.59 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104 °F)
- Control	Manual, Timer, DMX 512 Wireless, Wireless DMX	Manual, Timer, DMX 512 Wireless, Wireless DMX
- DMX channels	1 channel	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Included accessories	W-1 Wireless Radio Transmitter	W-1 Wireless Radio Transmitter
- Optional accessories	W-515-HB Hanging Bracket	W-515-HB Hanging Bracket
- Dimension	L 581 W 278 H 265 mm (L 22.87 W 10.94 H 10.43 inch)	L 561 W 278 H 265 mm (L 22.09 W 10.94 H 10.43 inch)
- Weight	19.1 kg (42.11 lbs)	14.5 kg (31.97 lbs)

W-515D / Patent No. (CHINA) ZL201210471041.X ZL201220615399.0 | (TAIWAN) M448321

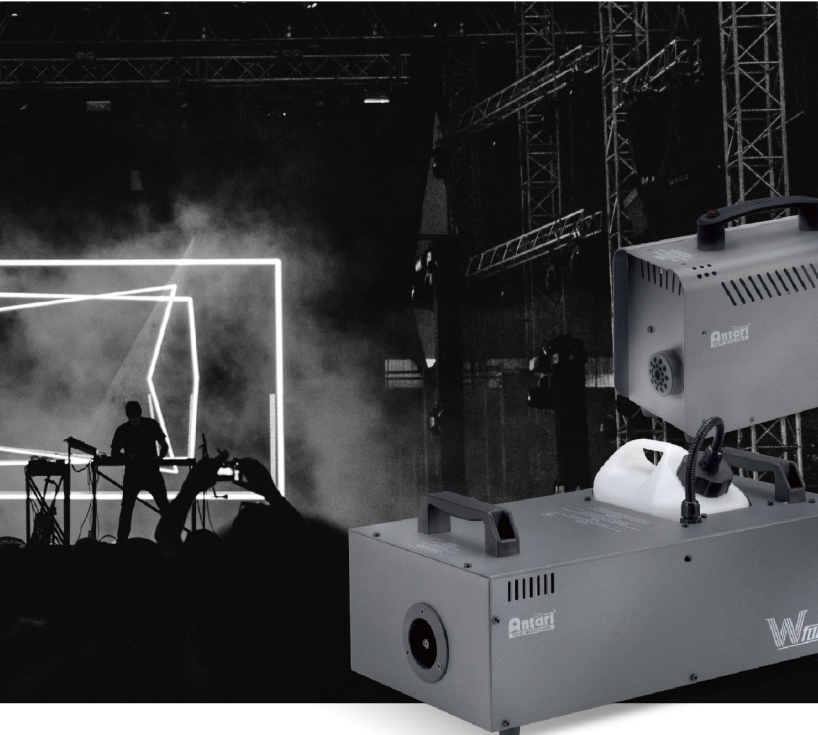

CONFORMS TO
ANSI/UL STD-499
CERTIFIED TO
CSA STD.
C22.2 NO.64

W-510

- Input voltage	US model : AC 100-120V, 50/60Hz 8.5A EU model : AC 220-240V, 50/60Hz 4.5A
- Rated power	120V 1000W / 240V 1070W
- Warm-up time	13 minutes (approx.)
- Fluid consumption	90 ml/min
- Fluid tank capacity	2.8 Liters (0.74 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Operating time	30 mins at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Control	DMX512, Wireless
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Included accessories	W-1 Wireless Radio Transmitter
- Optional accessories	W-510-HB Hanging Bracket
- Dimension	L 487 W 250 H 223 mm (L 19.17 W 9.84 H 8.78 inch)
- Weight	11.4 kg (25.13 lbs)



CONFORMS TO
ANSI/UL STD-499
CERTIFIED TO
CSA STD.
C22.2 NO.64

W-508

- Input voltage	US model : AC 100-120V, 50/60Hz 6.7A EU model : AC 220-240V, 50/60Hz 3.5A
- Rated power	800W
- Warm-up time	2 minutes (approx.)
- Fluid consumption	13 ml/min
- Fluid tank capacity	0.8 Liters (0.21 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Operating time	60 mins at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Control	Manual, Wireless
- DMX channels	-
- Connection	-
- Included accessories	W-1 Wireless Radio Transmitter
- Optional accessories	-
- Dimension	L 315 W 128 H 218 mm (L 12.40 W 5.04 H 8.58 inch)
- Weight	3.8 kg (8.38 lbs)

W-510 / Patent No. (USA) D699,318 | (CHINA) ZL201230637638.8 | (EUR) 00281610-001 | (TAIWAN) D156272



M-11

M-8

- Input voltage	US model : AC 100-120V, 50/60Hz 13.3A EU model : AC 220-240V, 50/60Hz 6.67A	US model : AC 100-120V, 50/60Hz 14.2A EU model : AC 220-240V, 50/60Hz 7.4A
- Rated power	1600W	1700W
- Warm-up time	13 minutes (approx)	9.5 minutes (approx.)
- Fluid consumption	400 ml/min (100% output)	240 ml/min
- Fluid tank capacity	10 Liters (2.64 gallon)	10 Liters (2.64 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid Antari FLZ Long Hang Time Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid -
- Ambient temp/ range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104 °F)
- Control	Manual, Timer, DMX 512 Wireless (Optional), Wireless DMX (Optional)	Manual, Timer, DMX 512 Wireless (Optional)
- DMX channels	1 or 3 channels	1 channel
- Connection	Neutrik TRUE 1 Connector (Power) XLR 3-pin & 5-pin (DMX)	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Included accessories	-	M-21 Control Module
- Optional accessories	TIMO-W-DMX-PCBR Wireless DMX WTR-20 Wireless TIMO-WTR-70 Wireless DMX & Remote	M-31 Wireless Control Module M-5-HB Hanging Bracket -
- Dimension	L 675 W 320 H 285 mm (L 26.57 W 12.6 H 11.22 inch)	L 690 W 320 H 298 mm (L 27.17 W 12.60 H 11.73 inch)
- Weight	25 kg (55.1 lbs)	22 kg (48.5 lbs)

M-8 / Patent No. (TAIWAN) 363449 099885 D155178
M-11 / Patent No. (CHINA) ZL201210471041.X ZL201220615399.0 | (TAIWAN) M448321



M-10

M-5

- Input voltage	-	US model : AC 100-120V, 50/60Hz 12.5A
	EU model : AC 220-240V, 50 / 60Hz 13A	EU model : AC 220-240V, 50/60Hz 6.6A
- Rated power	3000W	1500W
- Warm-up time	9.5 minutes (approx.)	8 minutes (approx.)
- Fluid consumption	250 ml/min	160 ml/min
- Fluid tank capacity	10 Liters (2.64 gallon)	10 Liters (2.64 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104°F)
- Control	Manual, Timer, DMX512 Wireless (Optional)	Manual, Timer, DMX512 Wireless (Optional)
- DMX channels	1 channel	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin and 5-pin (DMX)	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Included accessories	M-20 Control Module	M-20 Control Module
- Optional accessories	M-30 Pro Wireless Control Module	M-30 Pro Wireless Control Module
	-	M-5-HB Hanging Bracket
- Dimension	L 690 W 320 H 298 mm (L 27.17 W 12.60 H 11.73 inch)	L 668 W 320 H 276 mm (L 26.30 W 12.60 H 10.87 inch)
- Weight	21 kg (46.30 lbs)	15.5 kg (34.17 lbs)

M-5 / M-10 / Patent No. (TAIWAN) 363449 099885 D15178



CONFORMS TO
ANSI/UL STD.499
CERTIFIED TO
CSA STD.
C22.2 NO.64

Z-3000II



CONFORMS TO
ANSI/UL STD.499
CERTIFIED TO
CSA STD.
C22.2 NO.64

Z-1500II

- Input voltage	-	US model : AC100-120V, 50/60Hz 12.5A
- Rated power	EU model : AC 220-240V, 50/60Hz 11A 2500W	EU model : AC 220-240V, 50/60Hz 6.3A 1500W
- Warm-up time	12 minutes (approx.)	10 minutes (approx.)
- Fluid consumption	200 ml/min	110 ml/min
- Fluid tank capacity	6 Liters (1.59 gallon)	6 Liters (1.59 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Ambient temp. range	0°C - 40 °C (32°F - 104°F)	0°C - 40 °C (32°F - 104°F)
- Control	Manual, DMX 512, Timer Wireless (Optional)	Manual, DMX 512, Timer Wireless (Optional)
- DMX channels	1 channel	1 channel
- Connection	XLR 3-pin & 5-pin (DMX)	XLR 3-pin & 5-pin (DMX)
- Included accessories	Z-20 Control Module	Z-20 Control Module
- Optional accessories	Z-30 Pro Wireless Remote	Z-30 Pro Wireless Remote
- Dimension	L 735 W 310 H 269 mm (L 28.94 W 12.20 H 10.59 inch)	L 688 W 285 H 257 mm (L 27.09 W 11.22 H 10.12 inch)
- Weight	19.9 kg (43.87 lbs)	14 kg (30.86 lbs)

Z-1500II / Patent No. (CHINA) ZL200530066266.8



CONFORMS TO
ANSI/UL STD.499
CERTIFIED TO
CSA STD.
C22.2 NO.64

Z-1200II

Z-1000II

- Input voltage	US model : AC 100-120V, 50/60Hz 10A EU model : AC 220-240V, 50/60Hz 5.5A	US model : AC 100-120V, 50/60Hz 9A EU model : AC 220-240V, 50/60Hz 4.5A
- Rated power	120V 1200W 240V 1300W	120V 1000W 240V 1050W
- Warm-up time	10 minutes (approx.)	6 minutes (approx.)
- Fluid consumption	72 ml/min	56 ml/min
- Fluid tank capacity	2.5 Liters (0.66 gal)	1.7 Liters (0.45 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid
- Ambient temp. range	0°C - 40 °C (32°F - 104°F)	0°C - 40 °C (32°F - 104°F)
- Control	Manual, DMX 512, Timer Wireless (Optional)	Manual, DMX 512 Timer (Optional), Wireless (Optional)
- DMX channels	1 channel	1 channel
- Connection	XLR 3-pin (DMX) -	IEC (Power) XLR 3-pin (DMX)
- Included accessories	Hanging Bracket Z-8 Cable Timer Remote	Hanging Bracket Z-10 Cable Remote
- Optional accessories	Z-9 Wireless Remote -	Z-40 Cable Timer Remote Z-50 Wireless Remote
- Dimension	L 458 W 243 H 251 mm (L 18.03 W 9.57 H 9.88 inch)	L 433 W 198 H 214 mm (L 17.05 W 7.80 H 8.43 inch)
- Weight	10.9 kg (24.03 lbs)	6.6 kg (14.55 lbs)

Z-1000II / Patent No. (CHINA) ZL201230637638.8 ZL200530066270.4 | (TAIWAN) 476300
 Z-1200II / Patent No. (CHINA) ZL201230637638.8 ZL200530066268.7 | (TAIWAN) 476300



Z-800II

CONFORMS TO
ANSI/UL STD.499
CERTIFIED TO
CSA STD.
C22.2 NO.64

- Input voltage	US model : AC 100-120V, 50/60HZ 6.7A EU model : AC 220-240V, 50/60Hz 3.5A	- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Rated power	800W	- Control	Manual Timer (Optional) Wireless (Optional)
- Warm-up time	2 minutes (approx.)	- Included Accessories	Z-10 Cable Remote
- Fluid consumption	13 ml/min	- Optional accessories	Z-40 Cable Timer Remote Z-50 Wireless Remote
- Fluid tank capacity	0.8 Liters (0.21 gallon)	- Dimension	L 315 W 128 H 218 mm (L 12.40 W 5.04 H 8.58 inch)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	- Weight	3.5 kg (7.71 lbs)
- Operating time	60 mins at max. output		

Patent No. (CHINA) ZL2005300662269.1



M-9

- Input voltage	US model : AC 100-120V. 50/60Hz 15.2A EU model : AC 220-240V. 50/60Hz 7.6A	- DMX channels	10 / 15 / 25 channels
- Rated power	1820W	- Connection	Neutrik TRUE 1 Connector (Power) XLR 3-pin & 5-pin (DMX)
- Light Source	27 x 8W LED (5-in-1 LED)	- Included accessories	W-2 Wireless Radio Transmitter
- Warm-up time	14 minutes (approx.)	- Optional accessories	TIMO-WTR-90 Wireless DMX
- Fluid consumption	400 ml/min (100% output)		M-9-HB Omega Hanging Bracket (*Note: One M-9 requires 2 pcs M-9-HB.)
- Fluid tank capacity	6 Liters (1.59 gallon)	- Dimension	L 393 W 321 H 420 mm (L 15.47 W 12.63 H 16.53 inch)
- Compatible fluid	Antari FLC Super Light Fog Fluid	- Weight	25 kg (55.1 lbs)
- Ambient temp / range	0°C - 40°C (32°F - 104°F)		
- Output	10 meters height		
- Control	Manual, Timer, DMX 512. Master / Slave, Wireless Wireless DMX (Optional)		



M-7X

Z-1520

- Input voltage	US model : AC 100-120V, 50/60Hz 13A EU model : AC 220-240V, 50/60Hz 6.5A	US model : AC 100-120V, 50/60Hz 13.5A EU model : AC 220-240V, 50/60Hz 7A
- Rated power	1516W	1516W
- Light source	22x3W LED (5Red, 6Green, 6Blue, 5Amber)	22x3W LED (8Red, 7Green, 7Blue)
- Warm-up time	7 minutes (approx.)	5 minutes (approx.)
- Fluid consumption	200 ml/min	150 ml/min
- Fluid tank capacity	2.4 Liters (0.63 gallon)	2.4 Liters (0.63 gallon)
- Compatible fluid	Antari FLC Super Light Fog Fluid	Antari FLC Super Light Fog Fluid
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	0°C - 40 °C (32°F - 104°F)
- Output	10 meters height	6 meters height
- Control	Manual, Timer, DMX 512, Master / Slave, Wireless Wireless DMX (Optional)	Manual, Timer, DMX 512 MasterSlave, Wireless
- DMX channels	9 channels	8 channels
- Connection	Neutrik TRUE 1 Connector (Power) XLR 3-pin & 5-pin (DMX)	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Included accessories	W-2 Wireless Radio Transmitter	W-2 Wireless Radio Transmitter
- Optional accessories	TIMO-WTR-90 Wireless DMX	FX-4 Flight Case
- Dimension	L 346 W 193 H 383 mm (L 13.62 W 7.6 H 15 inch)	L 418 W 295 H 210 mm (L 16.46 W 11.61 H 8.27 inch)
- Weight	14 kg (30.8 lbs)	10.4 kg (22.93 lbs)

M-7X, Z-1520 / Patent No. (CHINA) ZL201210471041.X ZL201220615399.0 | (TAIWAN) M448321 537058



CONFORMS TO
ANSI/UL STD-999
CERTIFIED TO
CSA STD.
C22.2 NO.64
Intertek
9700333

W-715




Z-1020



- Input voltage	US model : AC 100-120V, 50/60Hz 14A EU model : AC 220-240V, 50/60Hz 7A	US model : AC 100-120V, 50/60Hz 9A EU model : AC 220-240V, 50/60Hz 4.5A
- Rated power	1680W	1000W
- Warm-up time	7.5 minutes (approx.)	13 minutes (approx.)
- Fluid consumption	300 ml/min	90 ml/min
- Fluid tank capacity	2.4 Liters (0.63 gallon)	2.4 Liters (0.63 gallon)
- Compatible fluid	Antari FLC Super Light Fog Fluid	Antari FLC Super Light Fog Fluid Antari FLR Light Fog Fluid
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)	0°C - 40 °C (32°F - 104°F)
- Output	8 meters height	5 meters height
- Control	Manual, Timer, DMX 512, Wireless	Manual, DMX512 Timer (Optional), Wireless (Optional)
- DMX channels	1 channel	1 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)	IEC (Power) XLR 3-pin (DMX)
- Included accessories	W-1 Wireless Radio Transmitter	Z-10 Cable Remote
- Optional accessories	FX-4 Flight case	Z-40 Cable Timer Remote Z-50 Wireless Remote
- Dimension	L 448 W 295 H 210 mm (L 17.64 W 11.61 H 8.27 inch)	L 408 W 295 H 199 mm (L 16.06 W 11.61 H 7.83 inch)
- Weight	15.5 kg (34.17 lbs)	9.8 kg (21.61 lbs)

W-715 / Patent No. (CHINA) ZL201210471041.X ZL201220615399.0 | (TAIWAN) M448321 537058
Z-1020 / Patent No. (CHINA) ZL200530066267.2

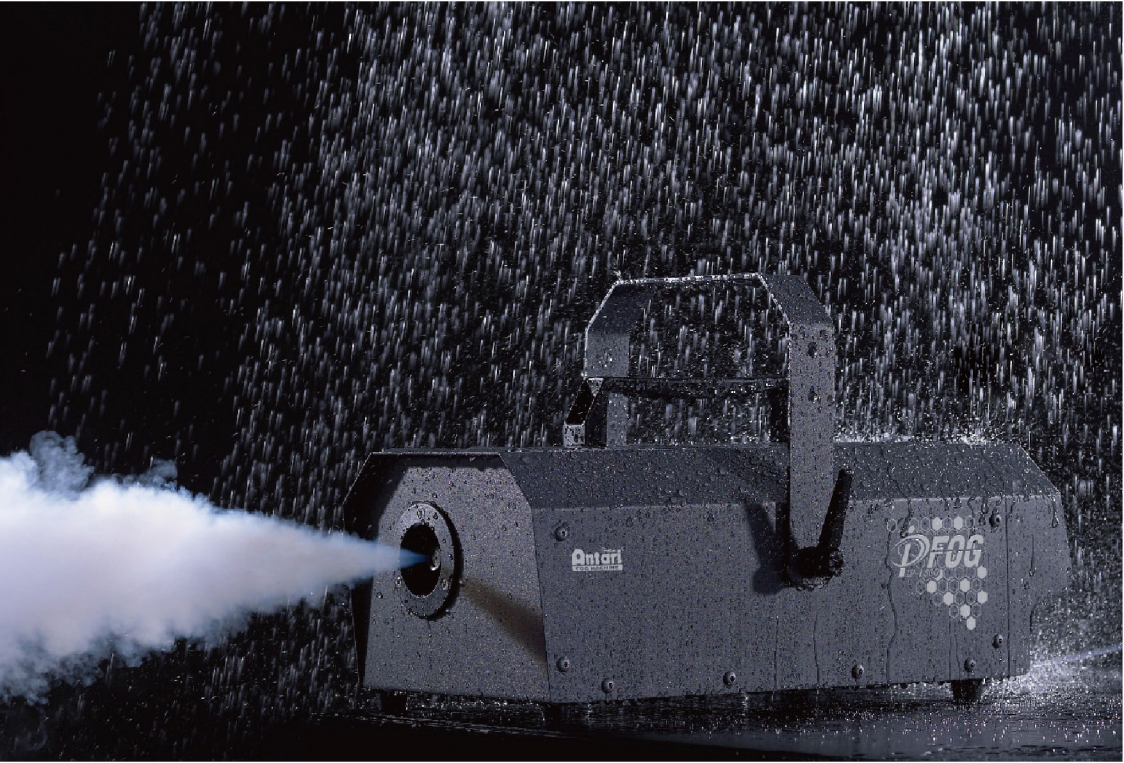

IP-1500



- Input voltage	US model : AC 100-120V, 50/60Hz 13A EU model : AC 220-240V, 50/60Hz 6.5A	- Control	Manual, Timer, DMX 512, Wireless
- Rated power	1550W	- DMX channels	1 channel
- Warm-up time	9 minutes (approx.)	- Connection	XLR 5-pin (DMX)
- Fluid consumption	100 ml/min	- Included accessories	W-1 Wireless Radio Transmitter Hanging Bracket
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLR Light Fog Fluid Antari FLH Super Fog Fluid	- Dimension	L 465 W 222 H 250 mm (L 18.31 W 8.74 H 9.84 inch)
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	- Weight	13.5 kg (29.76 lbs)

Patent No. (TAIWAN) M400357 D142035



MB-1



MB-20X



- Input voltage	DC 12V (Battery) AC 100-240V, 50/60Hz (Battery charger)	DC 12V (Battery) AC 100 - 240V, 50/60Hz (Battery charger)
- Rated power	75W	600W
- Warm-up time	1 second (approx.)	1 second (approx.)
- Fluid consumption	1.1 ml/min (MAX Output)	16 ml/min
- Fluid tank capacity	110 ml (0.03 gallon)	0.4 Liter (0.11gallon)
- Compatible fluid	Antari FLM-05S Fog Fluid	Antari FLM-05P Fog Fluid
- Ambient temp/ range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104°F)
- Control	Manual Timer (Optional) Wireless (Optional)	Manual, DMX512 Wireless (Optional) Cable Remote (Optional)
- DMX channels	-	1 channel
- Connection	-	XLR 3-pin (DMX)
- Included accessories	FLM-05S Fog Fluid 500ML Flightcase BAT-01 Battery MB-1-BCL Charger	MB-20X-B Battery MB-20X-BCL Charger FLM-05P Fog Fluid 500ML FFT-20 Flightcase
- Optional accessories	MCT-2 Cable Timer Remote MCR-1F Wireless Remote DCP-12 Power Adaptor and Dummy Battery	Z-3 Cable Remote WTR-20 Wireless Remote MB-20XS Power Base
- Dimension	L 228 W 66 H 112 mm (L 8.98 W 2.60 H 4.41 inch)	L 293 W 108 H 238 mm (L 11.54 W 4.25 H 9.37 inch)
- Weight	1 kg (without Battery) (2.2 lbs) 1.8 kg (with Battery) (3.97 lbs)	8.5 kg (18.74 lbs) -



F-7

- Input voltage	US model : AC 100-120V, 50/60Hz 13.5A EU model : AC 220-240V, 50/60Hz 7A	- Operating time	Faze Mode :2.8 hrs at max. output
- Rated power	1600W	- Ambient temp. range	0°C – 40°C (32°F – 104°F)
- Warm-up time	8 minutes (approx)	- Control	Manual, Timer, DMX 512, Wireless DMX
- Fluid consumption	Fog Mode : 140ml/min Faze Mode : 28ml/min	- DMX channels	3 channels
- Fluid tank capacity	5Liters (1.32gal) x 2 Pcs	- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Compatible fluid	Antari FLG-5E Heavy Fog Fluid Antari FLH-5E Super Fog Fluid Antari FLZ-5E Superior Fog Fluid	- Dimension	L728 W 428 H 719 mm (L 28.66 W 16.85 H 28.31 inch)
	(Only applicable to machines manufactured after May 2020)	- Weight	52.5 kg (115.74 lbs)



F-4

- Input voltage	US model : AC 100-120V, 50 / 60Hz 12.5A EU model : AC 220-240V, 50 / 60Hz 6.3A
- Rated power	1450W
- Warm-up time	1 minutes (approx.)
- Fluid consumption	6.7 ml/min
- Fluid tank capacity	5 Liters (1.32 gallon)
- Compatible fluid	Antari FLG-5E Heavy Fog Fluid Antari FLH-5E Super Fog Fluid
- Operating time	12 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Control	Manual, DMX512, Timer Wireless DMX (Optional)
- DMX channels	2 channels
- Connection	XLR 3-pin & 5-pin (DMX)
- Optional accessories	TIMO-W-DMX-PCBR Wireless DMX
- Dimension	L 545 W 458 H 285 mm (L 21.46 W 18.03 H 11.22 inch)
- Weight	20.3 kg (44.75 lbs)

F-2

- Input voltage	US model : AC 100-120V, 50/60Hz 8.5A EU model : AC 220-240V, 50/60Hz 6.5A
- Rated power	120V 1000W 240V 1450W
- Warm-up time	1.5 minutes (approx.)
- Fluid consumption	6.5 ml/min
- Fluid tank capacity	5 Liters (1.32 gallon)
- Compatible fluid	Antari FLG-5E Heavy Fog Fluid Antari FLH-5E Super Fog Fluid
- Operating time	12 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Control	Manual, DMX512, Timer
- DMX channels	-
- Connection	XLR 3-pin & 5-pin (DMX)
- Optional accessories	-
- Dimension	L 399 W 443.1H 267.1 mm (L 15.7 W 17.5 H 10.52 inch)
- Weight	14.7 kg (32.4 lbs)



F-1

- Input voltage	US model : AC 100-120V, 50/60Hz 6.8A EU model : AC 220-240V, 50/60Hz 3.5A	- Control	Manual, DMX512, Timer Wireless (Optional)
- Rated power	800W	- DMX channels	Wireless DMX (Optional) 2 channels
- Warm-up time	4.5 minutes (approx)	- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Fluid consumption	8.5 ml/min	- Optional accessories	TIMO-W-DMX-PCBR Wireless DMX WTR-10 Wireless Remote
- Fluid tank capacity	2.4 Liters (0.63 gallon)	- Dimension	TIMO-WTR-40 Wireless DMX and Remote L 618 W 275 H 327 mm
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLH Super Fog Fluid Antari FLZ Long Hang Time Fog Fluid (Only applicable to machines manufactured after May 2020)	- Weight	(L 24.33 W 10.83 H 12.87 inch) 14.1 kg (31.09 lbs)
- Operating time	4.5 hrs at max. output		
- Ambient temp. range	0°C - 40°C (32°F - 104°F)		

Patent No. (TAIWAN) 518188 D157441 537058



Z-390

Z-350

- Input voltage	US model : AC 100-120V, 50/60Hz 8.5A EU model : AC 220-240V, 50/60Hz 6.5A	US model : AC 100-120V, 50/60Hz 6A EU model : AC 220-240V, 50/60Hz 3.15A
- Rated power	120V 1000W 240V 1450W	120V 700W 240V 750W
- Warm-up time	1.5 minutes (approx.)	4.5 minutes (approx.)
- Fluid consumption	8 ml/min	3 ml/min
- Fluid tank capacity	4 Liters (1.06 gallon)	1.3 Liters (0.34 gallon)
- Compatible fluid	Antari FLG Heavy Fog Fluid Antari FLH Super Fog Fluid	Antari FLG Heavy Fog Fluid Antari FLH Super Fog Fluid
- Operating time	8 hrs at max. output	7 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104°F)
- Control	Manual, DMX 512, Timer Wireless (Optional)	Manual, DMX 512 -
- DMX channels	2 channels	2 channels
- Connection	IEC (Power) XLR 3-pin & 5-pin (DMX)	IEC (Power) XLR 3-pin (DMX)
- Included accessories	Hanging Bracket	-
- Optional accessories	Z-3 Cable Remote WTR-20 Wireless Remote -	Z-3 Cable Remote FZ-350 Flight Case FX-4 Flight Case
- Dimension	L 368 W 277.7 H 267.4 mm (L 14.49 W 10.93 H 10.53 inch)	L 320 W 153 H 391 mm (L 12.60 W 6.02 H 15.39 inch)
- Weight	9.45 kg (20.83 lbs)	8.5 kg (18.74 lbs)

Z-350 / Patent No. (USA) D699,318 | (CHINA) ZL201230637638.8 |
(EUR) 00281610-001 | (TAIWAN) D156272



CH-1

- Input voltage	AC 100-240V, 50/60Hz 6A	- Ambient temp/range	0°C – 40°C (32°F – 104°F)
- Rated power	120V 600W 240V 1250W	- Control	Manual, Timer, DMX 512. Wireless DMX (Optional)
- Warm-up time	8 minutes (approx)	- DMX channels	1 / 3 / 5 channel
- Fluid consumption	2 ml/min @40 psi / 2.76 bar	- Connection	Neutirk TRUE 1 Connector (Power) XLR 3-pin & 5-pin (DMX)
- Fluid tank capacity	2.5 Liters (0.66 gallon)		9/16 -18 R.H (Gas inlet)
- Compatible fluid	Antari CHL-2 Haze Fluid	- Included accessories	Pressure Gauge, Air Hose
- Gas type	CO2 .N2	- Optional accessories	W-DMX-PCBR, FCH-1 Flight Case
- Gas pressure range	50 – 60psi / 3.4 bar – 4.1bar	- Dimension	L 579 W 164 H 311 mm (L 22.79 W 6.46 H 12.25 inch)
- Gas consumption	0.36 Kg / hr @ 40 psi 0.18 Kg / hr @ 20psi	- Weight	17 kg (37.48 lbs)
- Control interface	TFT LCD Touch Screen		



HZ-1000

- Input voltage	US model : AC 100-120V, 50/60Hz 9.6A EU model : AC 220-240V, 50/60Hz 4.8A	- DMX channels	2 channels
- Rated power	1150W	- Connection	Neutrik TRUE 1 Connector (Power)
- Fluid consumption	2.2 ml/min	- Optional accessories	W-DMX-PCBR Wireless DMX
- Fluid tank capacity	6.4 Liters (1.69 gallon)	- Dimension	L 690 W 510 H 610 mm (L 27.16 W 20.07 H 24.01 inch)
- Compatible fluid	Antari HZL Haze Fluid	- Weight	74.6 kg (164.46 lbs)
- Operating time	40 hrs max. output		
- Ambient temp. range	0°C - 40°C (32°F - 104°F)		
- Control	Manual, Timer, DMX 512 Wireless DMX (Optional)		





CONFORMS TO
ANSI/UL STD.499
CERTIFIED TO
CSA STD.
C22.2 NO.64



HZ-500

HZ-400

- Input voltage	US model : AC 100-120V, 50/60Hz 3.5A EU model : AC 220-240V, 50/60Hz 2A	US model : AC 100-120V, 50/60Hz 3.92A EU model : AC 220-240V, 50/60Hz 2A
- Rated power	120V 400W 240V 480W	470W -
- Fluid consumption	1.1 ml/min	1.1 ml / min
- Fluid tank capacity	2.5 Liters (0.66 gallon)	2.5 Liters (0.66 gallon)
- Compatible fluid	Antari HZL Haze Fluid	Antari HZL Haze Fluid
- Operating time	37 hrs at max. output	37 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	0°C - 40°C (32°F - 104°F)
- Control	Manual, Timer, DMX 512	Manual, Timer, DMX, Wireless (Optional)
- DMX channels	1 channel	1 channel
- Connection	IEC (Power) XLR 5-pin (DMX)	IEC (Power) XLR 3-pin (DMX)
- Included accessories	-	HC-1 Cable Timer Remote
- Optional accessories	-	HCR-1 Wireless Remote
- Dimension	L 490 W 351 H 338 mm (L 19.29 W 13.82 H 13.31 inch)	L 500 W 320 H 319 mm (L 19.69 W 12.60 H 12.56 inch)
- Weight	31.5 kg (69.45 lbs)	18.5 kg (40.79 lbs)

HZ-500, HZ-400 / Patent No. (TAIWAN) 278419 302767



HZ-350

- Input voltage	US model : AC 100-120V, 50/60Hz 3.25A EU model : AC 220-240V, 50/60Hz 1.7A
- Rated power	390W
- Fluid consumption	0.8 ml/min
- Fluid tank capacity	2.5 Liters (0.66 gallon)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	52 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Control	Manual, Timer, DMX, Wireless
- DMX channels	1 channel
- Connection	IEC (Power) XLR 5-pin (DMX)
- Included accessories	W-1 Wireless Radio Transmitter
- Optional accessories	HC-1 Cable Timer Remote
- Dimension	L 492 W 273 H 315 mm (L 19.37 W 10.75 H 12.40 inch)
- Weight	14.2 kg (31.31 lbs)



HZ-100

- Input voltage	US model : AC 100-120V, 50/60Hz 3.25A EU model : AC 220-240V, 50/60Hz 1.7A
- Rated power	390W
- Fluid consumption	0.7 ml/min
- Fluid tank capacity	2.5 Liters (0.66 gallon)
- Compatible fluid	Antari HZL Haze Fluid
- Operating time	60 hrs at max. output
- Ambient temp. range	0°C - 40°C (32°F-104°F)
- Control	Manual, Timer (Optional), Wireless (Optional)
- DMX channels	-
- Connection	IEC (Power)
- Included accessories	-
- Optional accessories	HC-1 Cable Timer Remote HCR-1 Wireless Remote
- Dimension	L 484 W 250 H 294 mm (L 19.06 W 9.84 H 11.57 inch)
- Weight	13.2 kg (29.1 lbs)

HZ-350, HZ-100 / Patent No. (TAIWAN) 278419 302767

DNG-250

- Input voltage	US model : AC 100-120V, 50/60Hz EU model : AC 220-240V, 50/60Hz
- Refrigerant	120V R- 404A . 1.98LB (0.9Kg) 240V R- 404A . 1.98LB (0.9Kg)
- Start current	120V / 75A 240V / 36A
- Rated power	120V / 16.1A 240V / 7.3A
- Fog power consumption	120V / 1600W 13.5A 240V / 1600W 6.8A
- Warm-up time	6 minutes (approx.)
- Fluid consumption	100 ml/min
- Fluid tank capacity	10 Liters (2.64 gallon)
- Compatible fluid	Antari FLL Low Fog Effects Fluid
- Ambient temp.range	5°C - 40°C (41°F - 104°F)
- Output	120 m2 / min
- Control	Manual, Timer, DMX 512
- DMX channels	2 channel
- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)
- Optional Accessories	FDNG-250 Flight Case FTA-200 Fog Conducting Hose Adaptor CODNG0600 3 Meter Fog Conducting Hose
- Dimension	L 780 W 608 H 715 mm (L 30.7 W 23.93 H 28.15 inch)
- Weight	130 kg (286.6 lbs)





FOG COOLER DNG-100

DNG-100	
- Input voltage	US model : AC 100-120V, 50/60Hz EU model : AC 220-240V, 50/60Hz
- Rated power	120V 750W 240V 600W
- Refrigerant	120V R - 404A, 1.39LB (0.63 Kg) 240V R - 404A, 1.39LB (0.63 Kg)
- Start Current	120V / 61A 240V / 21A
- Rated Current	120V / 6.7A 240V / 3.2A
- Ambient temp.range	5°C - 40°C (41°F - 104°F)
- Control	On/Off switch control
- Included accessories	FT-10 Fog Conducting Hose, FTA-11
- Optional accessories	FTA-1, FTA-2A, FTA-3
- Dimension	L 784 W 608 H 479 mm (L 30.86 W 23.93 H 18.85 inch)
-Weight	72 kg (158.73 lbs)

ICE-101

- Input voltage	US model : AC 100-120V, 50/60Hz 9.5A EU model : AC 220-240V, 50/60Hz 5A
- Rated power	1130W
- Warm-up time	4.5 minutes (approx.)
- Fluid consumption	25 ml/min
- Fluid tank capacity	2.5 Liters (0.66 gallon)
- Compatible fluid	Antari FLL Low Fog Effects Fluid Antari FLC Super Light Fog Fluid Antari FLR Light Fog Fluid
- Ambient temp.range	0°C - 40°C (32°F - 104°F)
- Output	43 m ² / min
- Control	Manual, Timer, DMX 512
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Included accessories	Z-8 Cable Timer Remote
- Dimension	L 660 W 355 H 443 mm (L 25.98 W 13.98 H 17.44 inch)
- Weight	24.4 kg (53.79 lbs)



SPECIAL EFFECTS

SNOW | BUBBLE | WIND



CONFORMS TO
UL STD 73
CERTIFIED TO
CSA STD C22.2 NO.68

Intertek
97.043.3.0

S-500(L)

- Input voltage	US model : AC 100-120V, 50/60Hz 7.5A EU model : AC 220-240V, 50/60Hz 3.8A	- Included accessories	S-500-ST-1010 Meter Extension Hose S-500L: ST-1010 Meter Extension Hose x 2 pcs
- Rated power	120V 900W 240V 890W	- Optional accessories	TIMO-W-DMX-PCBR Wireless DMX WTR-20 Wireless Remote TIMO-WTR-70 Wireless DMX and Remote SC-3 Cable Remote ST-1010 Meter Extension Hose PM-1 Pan Motor
- Fluid consumption	400 ml/min	- Dimension	S-500 : L 592 W 551 H 651 mm (L 23.31 W 21.69 H 25.63 inch)
- Fluid tank capacity	20 Liters (5.28 gallon)		S-500L : L 803 W 603 H 651 mm (L 31.61 W 23.74 H 25.63 inch)
- Compatible fluid	Antari SL-20N Snow & Foam Fluid Antari SL-20AN Premium Snow Fluid Antari SL-20H Super Dry Snow Fluid Antari SL-20C Anti-Freezing Snow Fluid Antari SL-20UV UV Snow Fluid	- Weight	S-500 : 37.2 kg (82.01 lbs); S-500L : 46.4 kg (102.29 lbs)
- Ambient temp. range	5°C - 40°C (41°F - 104°F)		
- Control	Manual, Timer, DMX 512 Wireless (Optional), Wireless DMX (Optional)		
- DMX channels	2 channels		
- Connection	Neutrik Powercon (Power) XLR 3-pin & 5-pin (DMX)		



SW-300

SW-250

- Input voltage	US model : AC 100-120V, 50/60Hz 7.5A EU model : AC 220-240V, 50/60Hz 3.8A	US model : AC 100-120V, 50/60Hz 10.8A EU model : AC 220-240V, 50/60Hz 3.8A
- Rated power	880W	120V 900W 240V 880W
- Fluid consumption	280 ml/min (100% output)	140 ml/min
- Fluid tank capacity	5 Liters (1.32 gallon)	5 Liters (1.32 gallon)
- Compatible fluid	Antari SL-N Snow & Foam Fluid (New Formula) Antari SL-AN Premium Snow Fluid (New Formula) Antari SL-H Super Dry Snow Fluid Antari SL-C Anti-Freezing Snow Fluid Antari SL-UV UV Snow Fluid	Antari SL Snow & Foam Fluid Antari SL-A Premium Snow Fluid Antari SL-N Snow & Foam Fluid (New Formula) Antari SL-AN Premium Snow Fluid (New Formula) Antari SL-H Super Dry Snow Fluid Antari SL-C Anti-Freezing Snow Fluid Antari SL-UV UV Snow Fluid
- Ambient temp / range	5°C - 40°C (41°F - 104°F)	5°C - 40°C (41°F - 104°F)
- Control	Manual, Timer, DMX 512, Wireless	Manual, Timer, DMX 512, Wireless
- DMX channels	2 channels	1 channel
- Connection	IEC (POWER) XLR 5-pin (DMX)	IEC (Power) XLR 5-pin (DMX)
- Included accessories	W-1 Wireless Radio Transmitter Hanging Bracket	W-1 Wireless Radio Transmitter Hanging Bracket
- Optional accessories	SC-3 Cable Remote SW-300-FB Floor Bracket	SC-2 Cable Remote SW-300-FB Floor Bracket
- Dimension	L 500 W 276 H 311.8 mm (L 19.68 W 10.87 H 12.27 inch)	L 539 W 276 H 310 mm (L 21.22 W 10.87 H 12.20 inch)
- Weight	11.5 kg (25.35 lbs)	11.5 kg (25.35 lbs)

SW-250 / Patent No. (TAIWAN) 309095 M444496 I487558

SW-250X

- WTR-10 Wireless Remote (Optional)
- SC-2 Cable Remote (Optional)
- SW-300-FB Floor Bracket (Optional)



S-200X

- Input voltage	US model : AC 100-120V, 50/60Hz 7.5A EU model : AC 220-240V, 50/60Hz 3.8A
- Rated power	880W
- Fluid consumption	140 ml/min
- Fluid tank capacity	5 Liters (1.32 gallon)
- Compatible fluid	Antari SL Snow & Foam Fluid Antari SL-A Premium Snow Fluid Antari SL-N Snow & Foam Fluid (New Formula) Antari SL-AN Premium Snow Fluid (New Formula) Antari SL-H Super Dry Snow Fluid Antari SL-C Anti-Freezing Snow Fluid Antari SL-UV UV Snow Fluid
- Ambient temp. range	5°C - 40°C (41°F - 104°F)
- Control	Manual, DMX 512
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Included accessories	Hanging Bracket SC-2 Cable Remote
- Optional accessories	SW-300-FB Floor Bracket
- Dimension	L 505 W 276 H 310 mm (L 19.88 W 10.87 H 12.20 inch)
- Weight	11.5 kg (25.35 lbs)

S-100X

- Input voltage	US model : AC 100-120V, 50/60Hz 7.5A EU model : AC 220-240V, 50/60Hz 3.8A
- Rated power	880W
- Fluid consumption	160 ml/min
- Fluid tank capacity	5 Liters (1.32 gallon)
- Compatible fluid	Antari SL Snow & Foam Fluid Antari SL-A Premium Snow Fluid Antari SL-N Snow & Foam Fluid (New Formula) Antari SL-AN Premium Snow Fluid (New Formula) Antari SL-H Super Dry Snow Fluid Antari SL-C Anti-Freezing Snow Fluid Antari SL-UV UV Snow Fluid
- Ambient temp. range	5°C - 40°C (41°F - 104°F)
- Control	Manual, DMX 512
- DMX channels	1 channel
- Connection	IEC (Power) XLR 3-pin (DMX)
- Included accessories	Hanging Bracket SC-2 Cable Remote
- Optional accessories	SW-300-FB Floor Bracket
- Dimension	L 505 W 276 H 310 mm (L 19.88 W 10.87 H 12.20 inch)
- Weight	11 kg (24.25 lbs)

S-200X / Patent No. (TAIWAN) 309095 M444496 I487558



B-200

- Input voltage	US model : AC 100-120V, 50/60Hz 1A EU model : AC 220-240V, 50/60Hz 0.5A	- DMX Channels	1 channel
- Rated power	120W	- Connection	IEC (Power) XLR 5-pin (DMX)
- Fluid consumption	50 ml/min	- Included accessories	Hanging Bracket
- Fluid tank capacity	2 Liters (0.53 gallon)	- Optional accessories	BCT-1 Timer Remote BCR-1 Wireless Remote
- Compatible fluid	Antari BL Bubble Fluid	- Dimension	L 421 W 250 H 213 mm (L 16.57 W 9.84 H 8.39 inch)
- Operating time	40 mins at max. output	- Weight	11 kg (24.25 lbs)
- Ambient temp. range	5°C - 40°C (41°F - 104°F)		
- Control	Manual, DMX 512 Timer (Optional). Wireless (Optional)		



CONFORMS TO
ANSI/UL STD 73
CERTIFIED TO
CAN/CSA STD C22.2
NO. 68-09

**B-100**

Intertek

W-101

- Input voltage	US model : AC 100-120V, 50/60Hz 0.25A EU model : AC 220-240V, 50/60Hz 0.13A	US model : AC 100-120V, 50/60Hz 0.25A EU model : AC 220-240V, 50/60Hz 0.13A
- Rated power	120V 30W 240V 32W	32W
- Fluid consumption	8.3 ml/min	8.3 ml/min
- Fluid tank capacity	0.7 Liters (0.18 gallon)	0.7 Liters (0.18 gallon)
- Compatible fluid	Antari BL Bubble Fluid	Antari BL Bubble Fluid
- Operating time	1.4 hrs at max. output	1.4 hrs at max. output
- Ambient temp. range	5°C - 40°C (41°F - 104°F)	5°C - 40°C (41°F - 104°F)
- Control	Manual	Manual, Wireless
- Included accessories	Hanging Bracket	W-1 Wireless Radio Transmitter Hanging Bracket
- Dimension	L 341 W 170 H 217 mm (L 13.43 W 6.69 H 8.54 inch)	L 350 W 170 H 217 mm (L 13.78 W 6.69 H 8.54 inch)
- Weight	4.2 kg (9.26 lbs)	4.8 kg (10.58 lbs)

W-101 / Patent No. (CHINA) ZL201030229414.4



AF-5X / AF-5XR



- Input voltage	US model : AC 100-120V, 50/60Hz 13A EU model : AC 220-240V, 50/60Hz 7.25A	- Housing Material	Flame Retardant Plastic (PE 9731)
- Rated power	1600W	- Control	Manual, DMX 512
- Ambient temp. range	0°C - 40°C (32°F - 104°F)	- DMX channels	1 channel
- Air flow	1743 CFM (High) 1567 CFM (Medium) 1351 CFM (Low)	- Connection	XLR 5-pin (DMX)
- Fan speed	1242 - 1480 rpm (AC 110V / 60Hz) 1175 - 1289 rpm (AC 220V / 60Hz)	- Included accessories	Wireless (AF-5XR)
		- Optional accessories	AF-5X-HB Hanging Bracket
		- Dimension	L 558 W 465 H 578 mm (L 21.97 W 18.31 H 22.76 inch)
		- Weight	17.5 kg (38.58 lbs)



AF-4

- Input voltage	US model : AC 100-120V, 50/60Hz 0.85A EU model : AC 220-240V, 50/60Hz 0.42A
- Rated power	100W
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Air flow	1187 CFM (AC 110V / 60 Hz) 1035 CFM (AC 220V / 60 Hz)
- Fan speed	1242 - 1480 rpm (AC 110V / 60Hz) 1175 - 1289 rpm (AC 220V / 60Hz)
- Control	Manual, Timer, DMX 512 Wireless (Optional)
- DMX channels	1 channel
- Connection	XLR 5-pin (DMX)
- Optional accessories	WTR-20 Wireless Remote Z-3 Cable Remote
- Dimension	L 353 W 377 H 517 mm (L 13.90 W 14.84 H 20.35 inch)
- Weight	9 kg (19.84 lbs)



AF-3 / AF-3X / AF-3S

- Input voltage	US model : AC 100-120V, 50/60Hz 1.1A EU model : AC 220-240V, 50/60Hz 0.53A
- Rated power	127W
- Ambient temp. range	0°C - 40°C (32°F - 104°F)
- Air flow	530 CFM(50Hz) 600 CFM(60Hz)
- Fan speed	750 - 2550 rpm (50Hz) 750 - 2800 rpm (60Hz)
- Control	Manual, DMX 512 Wireless (Optional)
- DMX channels	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Optional accessories	WTR-10 Wireless Remote Z-3 Cable Remote
- Dimension	AF-3 / AF-3X L 124 W 316 H 368 mm (L 4.88 W 12.44 H 14.49 inch) AF-3S L 160 W 312 H 336.4 mm (L 6.29 W 12.28 H 13.24 inch)
- Weight	AF-3 / AF-3X 6 kg (13.23 lbs) AF-3S 6.4 kg (14 lbs)

AF-3 / AF-3X Effects Fan



AF-3S Effects Fan



AF-3X model does not equip with Neutrik Powercon output socket.



FT-200

- Input voltage	US model : AC 100 -120V, 50/60Hz 13.5A EU model : AC 220-240V, 50/60Hz 7A	- Control	Manual, Timer, DMX512, Wireless
- Rated power	1600W	- DMX channels	1 channel
- Warm-up time	7.5 minutes (approx.)	- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)
- Fluid consumption	270 ml/min	- Included accessories	W-2 Wireless Radio Transmitter
- Fluid tank capacity	2.4 Liters (0.63gal)	- Optional accessories	Z-3 cable remote
- Compatible fluid	Antari FLP Fire Training Fog Fluid	- Dimension	L 301 W 195 H 414 mm (L11.85 W7.68 H16.3 inch)
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)	- Weight	16 kg (35.28 lbs)
- Output	8 meters height		

FT-200 / Patent No. (TAIWAN) 537058



FT-100



FT-20X



- Input voltage	US model : AC 100-120V, 50/60Hz 12A EU model : AC 220-240V, 50/60Hz 6A	DC 12V (Battery) AC 100-240V, 50-60Hz (Battery charger)
- Rated power	120V 1500W 240V 1450W	600W -
- Warm-up time	8.5 minutes (approx.)	1 second (approx.)
- Fluid consumption	100 ml/min	16 ml/min
- Fluid tank capacity	6 Liters (1.59 gallon)	0.4 Liters (0.11 gallon)
- Compatible fluid	Antari FLP Fire Training Fog Fluid	Antari FLM-05P Fog Fluid
- Ambient temp. range	0 °C - 40 °C (32 °F-104 °F)	0 °C - 40 °C (32 °F-104 °F)
- Control	Manual, Timer, DMX512, Wireless Cable Remote (Optional)	Manual, DMX512 Wireless (Optional) Cable Remote (Optional)
- DMX channels	1 channel	1 channel
- Connection	Neutrik Powercon (Power) XLR 5-pin (DMX)	XLR 3-pin (DMX)
- Included accessories	W-2 Wireless Radio Transmitter - - -	FT-20X-B Battery FT-20X-BCL Charger FLM-05P Fog Fluid 500ML FFT-20 Flightcase
- Optional accessories	Z-3 cable remote - -	WTR-20 Wireless Remote Z-3 Cable Remote FT-20XS Power Base
- Dimension	L 580 W 279 H 265 mm (L22.84 W10.99 H10.44 inch)	L 293 W 108 H 238 mm (L11.54 W4.25 H9.37 inch)
- Weight	14.6 kg (32.19 lbs)	8.5 kg (18.74 lbs)

FT-100, FT-20 / Patent No. (TAIWAN) 537058

ACCESSORIES

LIQUID SUPPLY | CONTROL MODULE | REMOTE

BLACKET | ADAPTOR | FLIGHT CASE

**LCU-2S**

- Input voltage	US model : AC 100-120V, 50/60Hz 0.46A EU model : AC 220-240V, 50/60Hz 0.23A
- Rated power	55W
- Fluid consumption	-
- Compatible fluid	Antari Fluid
- Ambient temp. range	5°C - 40°C (41°F - 104°F)
- Control	Auto IEC (Power)
- Connection	XLR 3-pin (Data)
- Optional accessories	- -
- Dimension	Supply unit L 179 W 167 H 84 mm (L7.05 W 6.57 H 3.31 inch) Tank unit L 158 W 103 H 248 mm (L6.22 W 4.06 H 9.76 inch)
- Weight	Supply unit 1.95 kg (4.30 lbs) Tank unit 1.8 kg (3.97 lbs)

LCU-1S

- Input voltage	US model : AC 100-120V, 50/60Hz 0.35A EU model : AC 220-240V, 50/60Hz 0.18A
- Rated power	40W
- Fluid consumption	400 ml / min
- Compatible fluid	Antari Fluid
- Ambient temp. range	5°C - 40°C (41°F - 104°F)
- Control	Manual, Timer, DMX 512 1 channel
- Connection	XLR 3-pin (DMX)
- Optional accessories	Z-8 Remote Control SC-2 Remote Control
- Dimension	L 203 W 179 H 96 mm (L 7.99 W 7.05 H 3.78 inch)
- Weight	3.3 kg (7.28 lbs) -



W-1



W-2

- Working Distance :	Up to 50 m (164 ft)	Up to 50 m (164 ft)
- Function :	Wireless ON/OFF There are 2 radio frequencies can be chosen. They are 315MHz & 433MHz respectively.	Wireless ON/OFF and Volume UP/DOWN There are 2 radio frequencies can be chosen. They are 315MHz & 433MHz respectively.
- Compatible With :	AF-3R, AF-3XR, AF-5XR, F-1, HZ-350, IP-1500, M-4, SW-250, SW-300, W-101, W-510, W-508, W-515D, W-530D, W-715	AF-4R, AF-6, FT-20X, FT-100, FT-200, M-7X, M-9, M-11, MB-20X, S-500, S-600, Z-390, Z-1520
- Features :	<ol style="list-style-type: none"> 1. Simple setting and operation : one click to register : one click to go ; and one click to stop. 2. Interchangeability : W-1 wireless radio transmitter is compatible with all Antari W series (signal receivers) 3. Modern metallic design honors your vision and professional. 	<p>W-2 is the advanced version of W-1 wireless radio transmitter.</p> <p>Compare to W-1, the biggest difference is W-2 comes with 4 buttons, which makes it more versatile.</p>

W-1 RECEIVER



W-2 RECEIVER



TIMO-W-DMXW1RX



W-DMX and W-1 Receiver

TIMO-W-DMXW2RX



W-DMX and W-2 Receiver

TIMO-W-DMX-PCB



TIMO-W-DMXR



W-DMX Receiver

WTR-10



W-1 Transmitter W-1 Receiver



AF-3 F-1 SW-250X

WTR-20



W-2 Transmitter W-2 Receiver



AF-4R AF-6 FT-20X MB-20X M-11 S-500(L) Z-390

TIMO-WTR-40



W-1 Transmitter TIMO-W-DMXW1R TIMO-W-DMX-PCB



F-1

TIMO-WTR-50



W-1 Transmitter TIMO-W-DMXW1R



F-1

TIMO-WTR-60



TIMO-W-DMXW1R TIMO-W-DMX-PCB



F-1

TIMO-WTR-70



W-2 Transmitter TIMO-W-DMXW2R TIMO-W-DMX-PCB



M-11 S-500(L)

TIMO-WTR-80



W-2 Transmitter TIMO-W-DMXW2R



M-11 S-500(L)

TIMO-WTR-90



TIMO-W-DMXW2R TIMO-W-DMX-PCB



M-7X M-9 M-11 S-500(L) S-600

TIMO-W-DMX-PCBR



TIMO-W-DMXR TIMO-W-DMX-PCB



F-1 F-4 M-11 S-500(L)






There are 2 radio frequencies can be chosen. They are 315MHz and 433MHz respectively.

CONTROL WIRELESS TIMER MODULE



	Compatible model	Cable length	Connector	Function
1	Z-20 Z-1500II, Z-3000II	2M	5 Pin XLR	Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF.
2	M-20 M-5, M-10	2M	5 Pin XLR	Timer with interval, duration and volume; set DMX address; continuous fogging; manual ON/OFF.
3	M-21 M-8	2M	5 Pin XLR	Timer with interval, duration and volume; set DMX address; manual ON/OFF.



	Compatible model	Working distance	Cable length	Connector	Function	
1	M-30 PRO 	M-5, M-10	Wireless, distance may vary depending on the interference	2M	5 Pin XLR	Included all functions of cable remote and comes with a W-1 Transmitter to activate and deactivate the machine fogging. For W-1 Wireless Transmitter, there are 2 radio frequencies can be chosen: 315MHz or 433MHz.
2	M-31 	M-8				
3	Z-30 PRO 	Z-1500II, Z-3000II				



Wireless distance may vary depending on the interference.

ACCESSORIES

LIQUID SUPPLY / CONTROL MODULE / REMOTE / BRACKET / ADAPTOR / FLIGHT CASE





		Cable Length	Connector	Function	Compatible With
1	Z-3 Remote	3m	1/4 Stereo	Volume, ON/OFF	AF-3, AF-4, FT-20X, FT-200, MB-20X, Z-350, Z-390
2	Z-8 Timer Remote	25ft	4 Pin XLR	Timer with interval, duration & volume; continuous fogging; manual ON/OFF	Z-1200II, ICE-101, LCU-1S
3	Z-9  Wireless Remote	Up to 50 m	4 Pin XLR	Wireless ON/OFF	Z-1200II
4	Z-10 Remote	25 ft	1/4 Stereo	ON/OFF (Toggle Switch)	Z-800II, Z-1000II, Z-1020, B-100X
5	Z-40 Timer Remote	25 ft	1/4 Stereo	Timer with interval and duration; manual ON/OFF	Z-800II, Z-1000II, Z-1020
6	Z-50  Wireless Remote	Up to 50 m	1/4 Stereo	Wireless ON/OFF	Z-800II, Z-1000II, Z-1020
7	BCR-1  Wireless Remote	Up to 50 m	1/4 Stereo	Wireless ON/OFF	B-100X, B-200
8	BCT-1 Timer Remote	25 ft	1/4 Stereo	Timer with interval and duration; manual ON/OFF	B-100X, B-200



Wireless distance may vary depending on the interference.




		Cable Length	Connector	Function	Compatible With
1	HC-1 Timer Remote	25 ft	1/4 Stereo	Timer with interval and duration; manual ON/OFF	HZ-100, HZ-350, HZ-400
2	HCR-1  Wireless Remote	Up to 50 m	1/4 Stereo	Wireless ON/OFF	HZ-100, HZ-400
3	MCR-1F  Wireless Remote	Up to 50 m	4 Pin DIN	Wireless ON/OFF	MB-1
4	MCT-2 Timer Remote	25 ft	4 Pin DIN	Timer with interval and duration; manual ON/OFF	MB-1

 Wireless distance may vary depending on the interference.




		Cable Length	Connector	Function	Compatible With
1	SC-2 Remote	25 ft	4 Pin XLR	ON/OFF and volume	AF-6, LCU-1S, S-100X, S-200X, SW-250, SW-250X
2	SC-3 Remote	25 ft	4 Pin XLR	Volume and Fan; manual ON/OFF	SW-300, S-500(L)
3	SC-4 Remote	25 ft	6 Pin XLR	Volume and Fan; manual ON/OFF	S-600

Hanging Bracket Sets




M-9-HB
Hanging Bracket
For M-9


Note: One M-9 requires 2 pcs M-9-HB.




M-5-HB
Hanging Bracket
For M-5, M-8

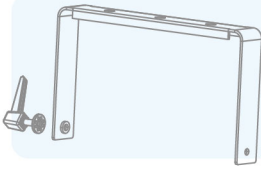

W-515-HB
Hanging Bracket
For W-515D, W-530D

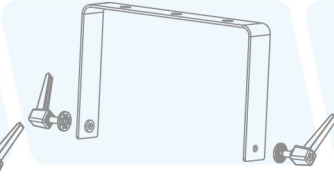

W-510-HB
Hanging Bracket
For W-510

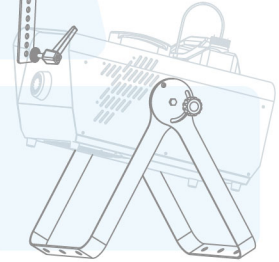

SW-300-FB
Floor Bracket
For S-100X, S-200X, SW-250,
SW-250X, SW-300

Fluid Tubes / Adaptors / Filters



- FT-4 : 4mm Fluid tube
- FT-6 : 6mm Fluid tube
- FLF-4 : Fluid filter for 4mm tube
- FLF-6 : Fluid filter for 6mm tube



- FTA-64 :
Adaptor for 4mm to 6mm
tube connection



- FTA-66 :
Adaptor for 6mm to
6mm tube connection



- FTA-664 :
T-type adaptor for two
6mm tubes to one
4mm tube connection

Remote Control Extension Cables



EXT-1 25 ft. extension cable
with 1/4 stereo plug




EXT-3 25 ft. extension cable with
5-pin XLR connectors



EXT-5 25 ft. extension cable with
5-pin DIN connectors

EXT-4 25 ft. extension cable with
3-pin XLR connectors

EXT-6 25 ft. extension cable with
4-pin XLR connectors

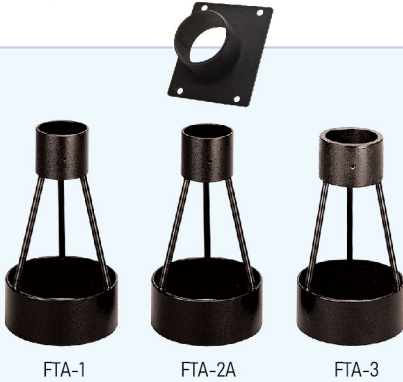

Fog Hose Adaptor

Adaptor for connecting fog conducting hose FT-10 for DNG-100 Fog Cooler to the desired Antari fog machine.

FTA-1:

Adaptor for connecting fog conducting hose FT-10 to M-5, M-8, M-10, W-510, W-515D, W-530D, IP-1000 and IP-1500 fog machines, in order to achieve strategic fog placement.

FTA-2A:

The same function as the FTA-1, specifically designed for Z-1000II and Z-1200II fog machines.

FTA-3:

The same function as the FTA-1, specifically designed for Z-1500II and Z-3000II fog machines.



FTA-200

Fog Conducting Hose Adaptor

Fog conducting hose adaptor for DNG-200 and DNG-250.

The hoses adaptor can be installed on it and this can split low fog output into two.



FT-10 Fog Conducting Hose

Fog conducting hose with 12cm diameter and is 10 meters in length.

The DNG-100 Low fog cooler is equipped with one FT-10 to connect to the fog machine.

This additional hose is needed to redirect the fog output coming out of the DNG-100.

With this optional hose, fog can be extended anywhere within 10m of the DNG-100.



FTA-11

Fog conducting hose adaptor for DNG-100.

The hoses adaptor can be installed on it and this can split low fog output into two.



FCH-1

- Dimensions (mm) : L 900 x W 574 x H 938
- Weight : 51.6 kg
- Compatible With : CH-1




FDNG-250

- Dimensions (mm) : L 865 W 695 H 1020
- Weight : 46.5 kg
- Compatible With : DNG-200, DNG-250



FZ-350

- Dimensions (mm) :
L 429 W 230 H 478
- Weight : 8.9 kg
- Compatible with : Z-350

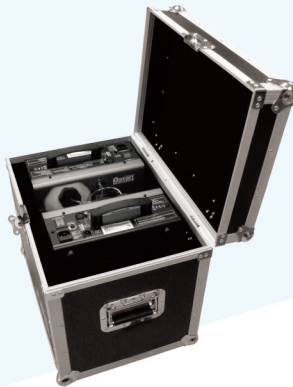

FX-4

- Dimensions (mm) :
L 495 W 418 H 500
- Weight : 12.3 kg
- Compatible With : Z-1020,
Z1520, W-715, Z-350
- Two units in one case



FX-6

- Dimensions (mm) :
L 730 W 453 H 425
- Weight : 12.3 kg
- Compatible With : S-100X,
S-200X, SW-250, SW-300

FLUID

FOG FLUID | HAZE FLUID | SNOW FLUID | BUBBLE FLUID | SCENT

FLUID

Antari premium fog fluids are optimized for use with all Antari fog machines and are suitable for use in most fogger models. All Antari fog fluids are water-based compositions that leave no oily residue and are eco-friendly to our environment and safe for human contact.

All of our fluids are odorless, non-irritating, non-toxic, and non-flammable and are designed to preserve the longevity of your machines, using Antari fog fluids in your Antari fog machine will actually increase the reliability of your fog machines for years.

Our Safety Data Sheets (SDS) and safety reports are compiled using the strictest standards by SGS, an internationally known independent laboratory.



FLR Light Fog Fluid

FEATURES

FLR Light Fog Fluid (red color) produces fog which disappears in the air faster.

FLG Heavy Fog Fluid

FEATURES

FLG Heavy Fog Fluid (green color) produces fog which has a longer lasting time.

AVAILABLE IN THE FOLLOWING SIZES:





FLH Super Density and Hang Time Fog Fluid

FLH produces fog with a higher density and longer hanging time than FLG. For use in fog and haze machines.



FLJ Light Hang Time Fog Fluid

FLJ produces fog with medium density and light hang time. For use in fog machines.



FLC Super Light Fog Fluid

For use in fog jet machine and low fog machine.



FLL Low Fog Effects Fluid

For low fog machine: ICE-101, DNG-200, DNG-250.



FLZ Superior Density and Hang Time Fog Fluid

FLZ produces fog with the highest density and longest hanging time among Antari fog fluids. For use in M-11 / F-1 & F-7 (manufactured after May 2020).



CHL-2 Haze Fluid

CHL-2 is a high quality oil based liquid for CH-1 cinema hazer to produce fine and translucent haze.

The haze produced by CH-1 and CHL Fluid can set off the stage lighting beautifully and create a wonderful stage design.



FLM-05S Fog Fluid

FLM-05S is a special formulated water based fluid for battery operated machine. Capable to generate pure and clean fog.

FOR USE IN:
MB-1 mobile fogger.



FLM-05P Fog Fluid

FLM-05P is a special formulated water based fluid for battery operated machine. Capable to generate pure and clean fog.

FOR USE IN:
MB-20X, FT-20X mobile fogger.



Bubble Fluid

Antari bubble fluid is a water-based composition that creates vivid, transparent bubbles.

For use in B-100, B-200 and W-101.



HZL-1 Oil Based Haze Fluid

Specially composed haze fluid. It's a non-toxic solution that produces a pure, translucent haze with a long hanging time.



HZL-1W Water-Base Haze Fluid

The water-based haze fluid is specifically designed for operations of Antari HZ Series Haze Machines. As it's water-based, it produces smooth haze, but leaves no greasy residue.

It's compatible with Antari HZ series model:
HZ-100/350/400/500/1000
Available in 1 liter and 5 liter.



UVL-01 UV Fluorescent Agent

Antari Blue UV Fluorescent Agent for use in all Snow and Bubble fluid. Turn your Snow or Bubble effect into a dramatic blacklight effect applications.

AVAILABLE in 100ml (3.38 fluid ounce)

INSTRUCTIONS

Mix one bottle of Antari UVL-01 (100ml) with up to 5 Liters of any Bubble or Snow fluid to turn your snow or bubble effect into a vibrant UV effect. That will glow in the dark when used with a professional UV Blacklight.

*Must be used with a UV source to achieve glowing effect.

SNOW FLUID



SL-UV Snow Fluid

The artificial snowflakes produced by UV snow fluids react to UV lights and glow in the dark with UV light sources.

COMPATIBLE MODEL

S-100X, S-200X, SW-250 / SW-250X, SW-300, S-500 / S-500L, S-600



SL-C Anti-Freezing Snow Fluid

- Anti-freezing snow fluid can satisfy the requirements of operating snow machines in low temperature environment.
- The lowest working temperature is -10°C (14°F)

COMPATIBLE MODEL

S-100X, S-200X, SW-250 / SW-250X, SW-300, S-500 / S-500L, S-600



SL-H Super Dry Snow Fluid

- SL-H can produce the highest snow volume and driest snowflakes among all Antari snow liquids.
- Good for outdoor operation.

COMPATIBLE MODEL

S-100X, S-200X, SW-250 / SW-250X, SW-300, S-500 / S-500L, S-600



SL-AN Premium Snow Fluid
(New Formula)

- Compare to SL-N, the snowflakes created by SL-AN are slightly larger in size and dissipate in air quicker.
- Good for indoor and outdoor operation.

COMPATIBLE MODEL
S-100X, S-200X, SW-250 / SW-250X, SW-300, S-500 / S-500L, S-600



SL-N Snow and Foam Fluid
(New Formula)

- Artificial snowflake produced by SL-N is smaller in size, drier and lighter compared to SL and SL-A.
- Bigger snowflakes volume compared to SL.
- Good for indoor and outdoor operation.

COMPATIBLE MODEL
S-100X, S-200X, SW-250 / SW-250X, SW-300, S-500 / S-500L, S-600



SL-A Premium Snow Fluid

- Compare to SL, snowflakes created by SL-A are larger in volume and can dissipate in air quicker.
- Good for indoor and outdoor operation.

COMPATIBLE MODEL
S-100X, S-200X, SW-250 / SW-250X



SL Snow and Foam Fluid

- Mildest formula. Artificial snowflakes produced by it with the least irritating smell and big snowflakes
- Good for indoor and outdoor operation.

COMPATIBLE MODEL
S-100X, S-120, S-200X, SW-250 / SW-250X



MG-550 Magican

The world's smallest haze spray; the Magican produces a long lasting haze with 1-2 hours of hanging time. One Magican will haze continuously for five minutes.

A haze effect can be achieved after approximately 20 seconds of spraying in an average sized room, allowing for approximately 15 hazing sessions per can.

The Magican is designed for situations where only a relatively small amount of haze is needed. It is perfect for mobile DJs and home parties.



C-300 Cleaning and Maintenance Solution

Antari C-300 designed for maintaining pump of effects machine on its best performance. By applying this special formulated solution on a regular basis will keep the pump at optimal condition. Use this maintenance solution before storage will prevent the pump from dry out and clogging.

Scent

P-1: Rose



P-2: Mint



P-4: Apple



P-6: Lemon



P-7: Strawberry



P-9: Orange



Simply put a few drops of these high quality scent into the fluid tank. You will have scented fog right away! 6 fragrances are available in a standard 20 ml bottle. The ideal mix ratio of scent and fluid is 1:1000 For instance: adding 1ml scent into 1liter fog fluid can have the best effect of scented fog.

FLP Fire Training Smoke Fluid



FLM-05P Smoke Fluid

FEATURES

FLM-05P is a special formulated water based fluid for battery operated machine.

Capable to generate pure and clean fog.

FOR USE IN: MB-20X, FT-20X mobile fogger.



FLP-700 Fire Training Smoke Fluid

FLP-700 is water based FLP fog fluid filled in a pressurized canister which can be installed in fog machines without fluid pump.

FEATURES

FLP Fog Fluid in a Pressurized Canister

FOR USE IN FT-50, FT-55, MB-55



FLP Fire Training Smoke Fluid

Antari FLP fog fluid is specifically made for Fire Training machines.

FEATURES

- The ingredients of this water-based fog liquid are refined from palm trees.
- It is 100% natural, completely non-toxic and safe.
- It can produce high density fog and is ideal for using in poor ventilation environments (such as fire drill or rescue training...etc.)

FOR USE IN: FT-100, FT-200

ACCSSERIES LIST

Included accessories

Optional accessories

FOG MACHINE

 W-530D W-515D	 W-1 Wireless Remote	 W-515-HB Hanging Bracket	
 W-510	 W-1 Wireless Remote	 W-510-HB Hanging Bracket	
 W-508	 W-1 Wireless Remote		
 M-11	 TIMO-W-DMX-PCBR	 WTR-20	 TIMO-WTR-70
 M-8	 M-21 Control Module	 M-31 Wireless Control Module	 M-5-HB Hanging Bracket
 M-10	 M-20 Control Module	 M-30 Pro Wireless Control Module	
 M-5	 M-20 Control Module	 M-30 Pro Wireless Control Module	 M-5-HB Hanging Bracket
 Z-3000II Z-1500II	 Z-20 Control Module	 Z-30 Pro Wireless Control Module	
 Z-1200II	 Z-8 Cable Remote	 Z-9 Wireless Remote	
 Z-1000II Z-800II	 Z-10 Cable Remote	 Z-40 Cable Timer Remote	 Z-50 Wireless Remote
 M-9	 W-2 Wireless Remote	 M-9-HB Omega Bracket	 TIMO-WTR-90
 M-7X	 W-2 Wireless Remote	 TIMO-WTR-90	

 Z-1520 W-715	 Z-1520 Wireless Remote	 W-715 Wireless Remote	 FX-4 Flight Case
 Z-1020	 Z-10 Cable Remote	 Z-40 Cable Timer Remote	 Z-50 Wireless Remote
	 FX-4 Flight Case		
 IP-1500	 W-1 Wireless Remote		
 M-11	 Case	 BAT-01 Battery + MB-1-BCL Charger	 FLM-05S Bottle of 500cc
 M-8	 DCP-12 Power Adaptor + Dummy Battery	 MCT-2 Cable Timer Remote	 MCR-1F Wireless Remote
 M-10	 Case	 MB-20X-B Battery + MB-20X-BCL	 FLM-05P Bottle of 500cc
 M-5	 Z-3 Cable Remote	 WTR-20	 MB-20S Power Base
 F-4	 TIMO-W-DMX-PCBRX		
 F-1	 TIMO-W-DMX-PCBR	 WTR-10	 TIMO-WTR-40
 Z-390	 Z-3 Cable Remote	 WTR-20	
 Z-350	 Z-3 Cable Remote	 FZ-350 Flight Case	 FX-4 Flight Case
 CH-1	 Pressure Gauge Air Hose	 W-DMX-PCBR	 FCH-1 Flight Case
		 AF-3S Fan to fit in FCH-1 Flight Case	

 HZ-1000	 W-DMX-PCBR		
 HZ-400	 HC-1 Cable Timer Remote	 HCR-1 Wireless Remote	
 HZ-350	 W-1 Wireless Remote	 HC-1 Cable Timer Remote	
 HZ-100	 HC-1 Cable Timer Remote	 HCR-1 Wireless Remote	
 DNG-250	 FDNG-250 Flight Case	 FTA-200 Fog Conducting Hose Adaptor	 CODNG0600 3 Meter Fog Conducting Hose
 DNG-100	 FT-10	 FTA-11	 FTA-1 FTA-2A FTA-3
 ICE-101	 Z-8 Cable Remote		

 SW-250	 W-1 Wireless Remote	 SW-300-FB Floor Bracket		
 SW-250X	 SC-2 Cable Remote	 WTR-10	 SW-300-FB Floor Bracket	
 S-200X	 S-100X	 SC-2 Cable Remote	 SW-300-FB Floor Bracket	
 B-200	 BCT-1 Cable Remote	 BCR-1 Wireless Remote		
 W-101	 W-1 Wireless Remote			
 AF-6	 SC-2 Cable Remote	 WTR-20		
 AF-5XR	 W-1 Wireless Remote	 AF-5X-HB Hanging Bracket		
 AF-5X(XR)	 WTR-20			
 AF-4	 AF-3	 AF-3S	 WTR-10	 Z-3 Cable Remote

SPECIAL EFFECTS

 S-600	 W-2 Wireless Remote	 Fluid Tube with Filter	 TIMO-WTR-90
	 SC-4 Cable Remote	 S-600-BH Bottle Holder	 S-600-TKC
 S-500(L)	 TIMO-W-DMX-PCBR	 WTR-20	 TIMO-WTR-70
	 SC-3 Cable Remote	 PM-1 PAN Motor	 S-500L Included
 SW-300	 W-1 Wireless Remote	 SC-3 Cable Remote	 SW-300-FB Floor Bracket

FIRE TRAINING


 FT-200	 FT-100	 W-2 Wireless Remote	 Z-3 Cable Remote
 FT-20X	 Case	 FT-20X-B Battery	 FT-20X-BCL Charger
	 FT-20X-BCL Charger	 FT-20X-BCL Charger	 FT-20X-BCL Charger
	 Z-3 Cable Remote	 WTR-20	 FT-20XS Power Base

DARKFX / UV EFFECTS

Intro


The prodigious DarkFX Series has adopted the latest LED technology with a peak wavelength of 365nm. Because 365nm is in the middle of UV-A wavelength the emitted light evenly covers the whole spectrum producing a traditional blacklight effect without the visible light associated with most LED based blacklights. All UV reactive material reflects perfectly with stunning bright and vivid colors.

Traditional blacklight fixtures emit long-wave ultraviolet (UV) light without much visible light. The UV spectrum ranges from 100 to 400 nanometers (nm), emitting light that is generally invisible to the human eye*, however the higher the "nm" rating the more visible light. Traditionally the entertainment industry has used the UV-A spectrum (315-400nm), which is not harmful to humans, widely adopted in light fixtures, counterfeit detection, medical use and industrial curing.

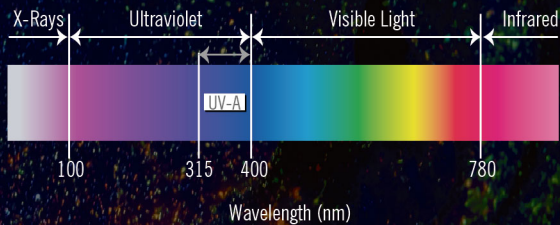

*Typical human eye will respond to wavelength from 390 to 700nm

DARKFX STRIP 1020

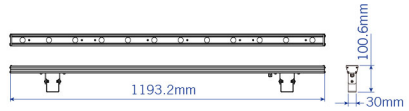

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 9000mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free


Specification

- | | | | |
|-----------------------|-----------------------------|---------------------|------------------------------|
| - Input voltage | DC 48V @ 0.5A | - Peak wavelength | 365nm |
| - Rated power | 24W | - Cable connection | 22 AWG wire cable |
| - LED | 12 x 1.9W High Power UV LED | - Housing | Aluminum Extrusion |
| - Optics | 40 degrees | - Protection rating | IP-20 Indoor use only |
| - Radiant flux output | 9000 mW | - Dimension | L 1193.2 x W 30 x H 100.6 mm |
| - Project lamp life | 20,000 hrs L70 at 25C | - Dry weight | 1.9 kg |

Illuminance measurement



Distance (m)	1	2	3	4	5
Intensity	450($\mu\text{W}/\text{cm}^2$) 4.50(W/m^2)	158($\mu\text{W}/\text{cm}^2$) 1.58(W/m^2)	79($\mu\text{W}/\text{cm}^2$) 0.79(W/m^2)	42($\mu\text{W}/\text{cm}^2$) 0.42(W/m^2)	31($\mu\text{W}/\text{cm}^2$) 0.31(W/m^2)
Intensity degradation rate (compare with 1m)	0%	64.9%	82.5%	90.7%	93.0%

Spectrum

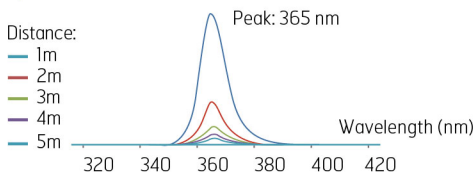



DARKFX WASH 2000 IP



Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Special optics will not degrade to high UV exposure
- Minimum visible light
- High output 24800mW at full intensity
- Flicker free
- Weather proof IP-65
- Neutrik Power CON Truel connector


Specification

- | | | | |
|---------------------|------------------------------|---------------------|--------------------------------|
| - Input voltage | AC100-240V 50-60Hz | - DMX channels | 1, 2 |
| - Rated power | 70W | - Operation | Digital display with 4 buttons |
| - LED | 33 x 1.9W High Power UV LED | - Power connection | 3-Pin waterproof connector |
| - Refresh rate | 500 Hz | - Data connection | 3-Pin waterproof connector |
| - Optics | 25 degrees | - Housing | Aluminum die-cast |
| - Output | 24800mW | - Protection rating | IP-65 |
| - Project lamp life | 20,000 hrs L70 at 25 degrees | - Dimension | L 454 x W 116 x H 331 mm |
| - Color range | 365nm | - Weight | 10.4 Kg |
| - Control option | DMX 512, Manual | | |


Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	5462($\mu\text{W}/\text{cm}^2$) 54.62(W/m^2)	1572($\mu\text{W}/\text{cm}^2$) 15.72(W/m^2)	718($\mu\text{W}/\text{cm}^2$) 7.18(W/m^2)	409($\mu\text{W}/\text{cm}^2$) 4.09(W/m^2)	251($\mu\text{W}/\text{cm}^2$) 2.51(W/m^2)
Intensity degradation rate (compare with 1m)	0%	71.2%	86.8%	92.5%	95.4%

Spectrum

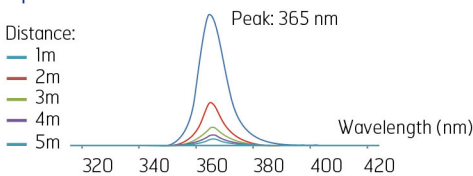

DARKFX WASH 2000

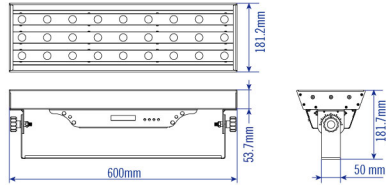

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 20290mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free
- Adjustable modular strips to maximize coverage


Specification

- Input voltage	AC100-240V 50-60Hz	- Operation	8 bit DMX 512
- Rated power	55W		2 x 16 digit display with 4 buttons
- LED	27 x 1.9W High Power UV LED	- Power connection	Neutrik Powercon in / through
- Refresh rate	500 Hz	- DMX data connection	5-pin XLR
- Optics	25 degrees	- Housing	Metal
- Radiant flux output	20290 mW	- Protection rating	IP-20 Indoor use only
- Project lamp life	20,000 hrs L70 at 25C	- Dimension	L 600 x W 181.2 x H 181.7 mm
- Peak wavelength	365nm	- Dry weight	6.37 kg
- Control option	DMX 512, Manual		
- DMX channels	1, 2		


Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	4184($\mu\text{W}/\text{cm}^2$) 41.84(W/m^2)	1737($\mu\text{W}/\text{cm}^2$) 17.37(W/m^2)	933($\mu\text{W}/\text{cm}^2$) 9.33(W/m^2)	648($\mu\text{W}/\text{cm}^2$) 6.48(W/m^2)	526($\mu\text{W}/\text{cm}^2$) 5.26(W/m^2)
Intensity degradation rate (compare with 1m)	0%	66.3%	83.8%	87.7%	90.9%

Spectrum

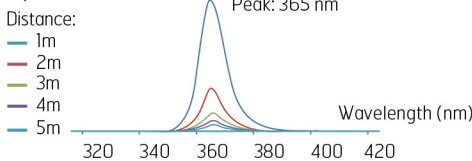

DARKFX SPOT 670

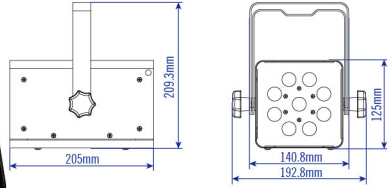

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 6760mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free
- 15 degrees narrow beam angle


Specification

- Input voltage	AC100-240V 50-60Hz	- DMX channels	1, 2
- Rated power	21W	- Operation	2 x 16 digit display with 4 buttons
- LED	9 x 1.9W	- Power connection	Neutrik Powercon in/through
	High Power UV LED	- DMX data connection	5-pin XLR
- Refresh rate	500 Hz	- Housing	Metal
- Optics	15 degrees	- Protection rating	IP-20 Indoor use only
- Radiant flux output	6760 mW	- Dimension	L 205 x W 125 x H 125 mm
- Project lamp life	20,000 hrs L70 at 25C	- Dry weight	2.64 kg
- Peak wavelength	365nm		
- Control option	RDM, DMX 512, Manual		


Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	4976($\mu\text{W}/\text{cm}^2$) 49.76(W/m^2)	1675($\mu\text{W}/\text{cm}^2$) 16.75(W/m^2)	807($\mu\text{W}/\text{cm}^2$) 8.07(W/m^2)	614($\mu\text{W}/\text{cm}^2$) 6.14(W/m^2)	451($\mu\text{W}/\text{cm}^2$) 45.1(W/m^2)
Intensity degradation rate (compare with 1m)	0%	66.3%	83.8%	87.7%	90.9%

Spectrum

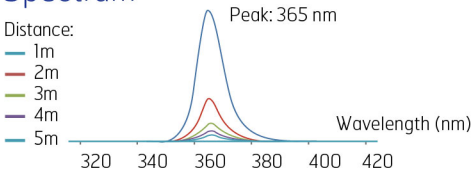

DARKFX STRIP 510

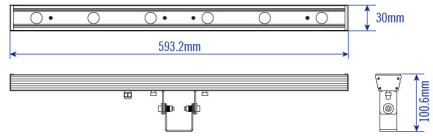

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 4500mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free




Specification

- | | | | |
|-----------------------|----------------------------|---------------------|-----------------------------|
| - Input voltage | DC 20-24V | - Cable connection | 22 AWG wire cable |
| - Rated power | 12W | - Housing | Aluminum Extrusion |
| - LED | 6 x 1.9W High Power UV LED | - Protection rating | IP-20 Indoor use only |
| - Optics | 25 degrees | - Dimension | L 593.2 x W 30 x H 100.6 mm |
| - Radiant flux output | 4500 mW | - Dry weight | 1.08 kg |
| - Project lamp life | 20,000 hrs L70 at 25C | | |
| - Peak wavelength | 365nm | | |


Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	700($\mu\text{W}/\text{cm}^2$) 7.00(W/m^2)	211($\mu\text{W}/\text{cm}^2$) 2.11(W/m^2)	99($\mu\text{W}/\text{cm}^2$) 0.99(W/m^2)	54($\mu\text{W}/\text{cm}^2$) 0.54(W/m^2)	38($\mu\text{W}/\text{cm}^2$) 0.38(W/m^2)
Intensity degradation rate (compare with 1m)	0%	69.8%	85.9%	92.2%	94.5%

Spectrum

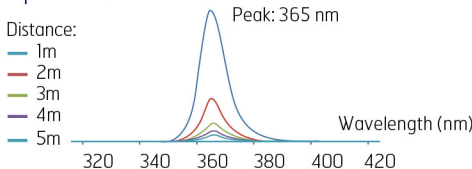

DARKFX STRIP 510 IP

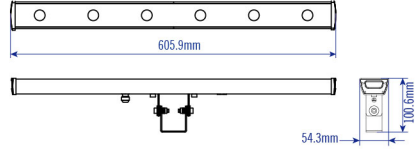

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 4500mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free


Features

- | | | | |
|-----------------------|----------------------------|---------------------|-------------------------------|
| - Input voltage | DC 20-24V | - Cable connection | 22 AWG wire cable |
| - Rated power | 12W | - Housing | Aluminum Extrusion |
| - LED | 6 x 1.9W High Power UV LED | - Protection rating | IP-65 |
| - Optics | 25 degrees | - Dimension | L 605.9 x W 54.3 x H 100.6 mm |
| - Radiant flux output | 4500 mW | - Dry weight | 1.08 kg |
| - Project lamp life | 20,000 hrs L70 at 25C | | |
| - Peak wavelength | 365nm | | |



Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	700($\mu\text{W}/\text{cm}^2$) 7.00(W/m^2)	211($\mu\text{W}/\text{cm}^2$) 2.11(W/m^2)	99($\mu\text{W}/\text{cm}^2$) 0.99(W/m^2)	54($\mu\text{W}/\text{cm}^2$) 0.54(W/m^2)	38($\mu\text{W}/\text{cm}^2$) 0.38(W/m^2)
Intensity degradation rate (compare with 1m)	0%	69.8%	85.9%	92.2%	94.5%

Spectrum

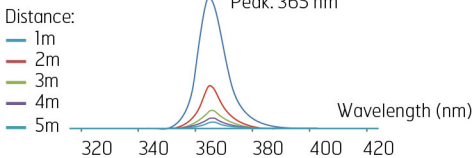

DARKFX SPOT 510 IP

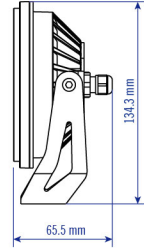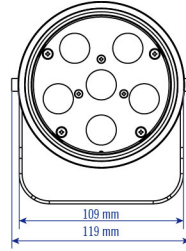

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 4500mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free
- Weather proof IP-65


Specification

- Input voltage	DC 20-24V	- Cable connection	22 AWG wire cable
- Rated power	12W	- Housing	Aluminum Die Casting
- LED	6 x 1.9W High Power UV LED	- Protection rating	IP-65
- Optics	15 degrees	- Dimension	W 110.5 x D 48.8 x H 134.3 mm
- Radiant flux output	4500mW	- Dry weight	0.71 kg
- Project lamp life	20,000 hours L70 at 25C		
- Peak wavelength	365nm		


Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	2062($\mu\text{W}/\text{cm}^2$) 20.62(W/m^2)	534($\mu\text{W}/\text{cm}^2$) 5.34(W/m^2)	213($\mu\text{W}/\text{cm}^2$) 2.13(W/m^2)	126($\mu\text{W}/\text{cm}^2$) 1.26(W/m^2)	76($\mu\text{W}/\text{cm}^2$) 0.76(W/m^2)
Intensity degradation rate (compare with 1m)	0%	74.1%	89.6%	93.9%	96.3%

Spectrum

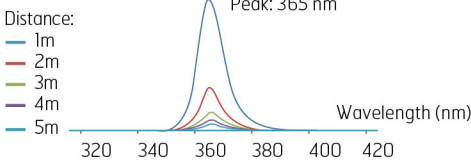

DARKFX SPOT 1750

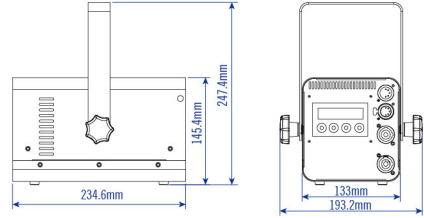

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 19080mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free
- 15 degrees narrow beam angle


Specification

- Input voltage	AC100-240V 50-60Hz	- DMX channels	1, 2
- Rated power	72W	- Operation	2 x 16 digit display with 4 buttons
- LED	4 x 16W High Power UV LED	- Power connection	Neutrik Powercon in / through
- Refresh rate	600 Hz	- DMX data connection	5-pin XLR
- Optics	20 degrees	- Housing	Metal
- Radiant flux output	19080 mW	- Protection rating	IP-20 Indoor use only
- Project lamp life	20,000 hrs L70 at 25C	- Dimension	L 234.6 x W 193.2 x H 247.4 mm
- Peak wavelength	365nm	- Dry weight	3.2 kg
- Control option	RDM, DMX 512, Manual		

Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	6573($\mu\text{W}/\text{cm}^2$) 65.73(W/m^2)	1760($\mu\text{W}/\text{cm}^2$) 17.6(W/m^2)	769($\mu\text{W}/\text{cm}^2$) 7.69(W/m^2)	43.9($\mu\text{W}/\text{cm}^2$) 4.39(W/m^2)	38($\mu\text{W}/\text{cm}^2$) 0.38(W/m^2)
Intensity degradation rate (compare with 1m)	0%	73.2%	88.3%	93.3%	95.6%

Spectrum

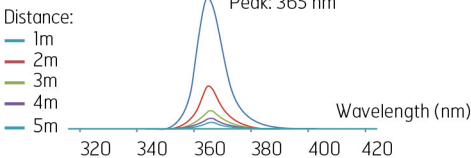

DARKFX DRIVE 4 MKII



Features

- Compact and robust design
- 4 output terminals for DarkFX UV fixtures
- Neutrik powercon in/thru
- 2 x 16 digit LCD display interface
- DMX control option
- RDM feature set



Specification

- Input voltage	AC100-240V 50-60Hz	- Fixture output	4 terminal block
- Rated power	100W	- Power connection	Neutrik Powercon in/through
- Refresh rate	600Hz	- DMX data connection	5-pin XLR
- Output current	Constant 500mA Max. per channel	- Housing	Metal
- Control option	RDM, DMX 512, Manual	- Protection rating	IP-20 Indoor use only
- DMX channels	1, 2	- Dimension	L 211 x W 167 x H 70 mm
- Operation	2 x 16 digit display with 4 buttons	- Dry weight	1.62 kg



"Although a watch is a statement of character and fashion, its primary purpose is to measure and communicate our most important resource. That resource is time.

Time is the one thing in which we are all equal. We cannot make more of it no matter how much we try. No amount of money or effort will influence its passing. In the time we have available, every moment must be seized, every opportunity taken.

In a day an idea is borne of inspiration

In a week ideas develop into projects

In a month a prototype is realised, ready for testing

In a year a product enters the market, the end result of time invested and passion committed

A lifetime a record of achievements, of developed ideas, of effort and enthusiasm, from beginnings through growth to maturity; from obscurity to recognition.

This is our commitment to you. Our time is devoted to our partners, supporters and clients – to reach our shared aspirations."



NEW!!

MODEL	RATED POWER	WARM UP TIME (approx.)	OUTPUT (Cuft / min)	FLUID TANK CAPACITY (LITER)	HANGING BRACKET
AF-3 / AF-3X	127W	N/A	N/A	N/A	YES
AF-4 / AF-4R	100W	N/A	N/A	N/A	YES
AF-5X / AF-5XR	1600W	N/A	N/A	N/A	● AF-5X-HB
NEW!! AF-6	250W	N/A	N/A	N/A	YES
B-100	120V/30W, 240V / 32W	N/A	N/A	0.7	YES
B-200	120W	N/A	N/A	2	YES
CH-1	120V / 600W, 240V / 1250W	8minutes	N/A	2.5	N/A
DNG-100	120V / 750W, 240V / 600W	N/A	N/A	N/A	N/A
DNG-250	1600W	6 minutes	120m2/min	10	N/A
F-1	800W	4.5minutes	N/A	2.4	N/A
F-2	120V / 1000W, 240V / 1450W	15 minutes	N/A	5	N/A
F-4	1450W	1minutes	N/A	5	N/A
F-7	1600W	8 minutes	N/A	5 x 2 pcs	N/A
FT-20X	600W	1sec	N/A	0.4	N/A
FT-100	120V 1500W, 240V 1450W	8.5minutes	N/A	6	N/A
FT-200	1600W	7.5 minutes	8 meters height	2.4	N/A
HZ-100	390W	N/A	N/A	2.5	N/A
HZ-350	390W	N/A	N/A	2.5	N/A
HZ-400	470W	N/A	N/A	2.5	N/A
HZ-500	120V / 400W, 240V / 480W	N/A	N/A	2.5	N/A
HZ-1000	1150W	N/A	N/A	6.4	N/A
ICE-101	1130W	4.5 minutes	43 m2/min	2.5	N/A
IP-1500	1550W	9 minutes	N/A	N/A	YES
LCU-1S	40W	N/A	N/A	N/A	N/A
LCU-2S	55W	N/A	N/A	N/A	N/A
M-5	1500W	8 minutes	N/A	10	● M-5-HB
M-7X	1516W	7 minutes	10 meters height	2.4	N/A
M-8	1700W	9.5 minutes	N/A	10	● M-5-HB
M-9	1820W	14 minutes	10 meters height	6	N/A
M-10	3000W	9.5 minutes	N/A	10	N/A
M-11	1600W	13 minutes	N/A	10	N/A
MB-1	75W	1sec	N/A	110 ml	N/A
MB-20X	600W	1sec	N/A	0.4	N/A
S-100X	880W	N/A	N/A	5	YES
S-200X	880W	N/A	N/A	5	YES
SW-250	120V / 900W, 240V / 880W	N/A	N/A	5	YES
SW-300	880W	N/A	N/A	5	YES
S-500	120V / 900W, 240V / 890W	N/A	N/A	20	N/A
S-600	1200W	N/A	N/A	5	YES
W-101	30W	N/A	N/A	0.7	YES
W-508	800W	2 minutes	N/A	0.8	N/A
W-510	120V / 1000W, 240V / 1070W	13 minutes	N/A	2.8	● W-510-HB
W-515D	1500W	10 minutes	N/A	6	● W-515-HB
W-530D	2570W	12 minutes	N/A	6	● W-515-HB
W-715	1680W	7.5 minutes	8 meters height	2.4	N/A
Z-800II	800W	2 minutes	N/A	0.8	N/A
Z-1000II	120V/1000W, 240V/1050W	6 minutes	N/A	1.7	YES
Z-1020	1000W	13 minutes	5 meters height	2.4	N/A
Z-1200II	120V/1200W, 240V/1300W	10 minutes	N/A	2.5	YES
Z-1500II	1500W	10 minutes	N/A	6	N/A
Z-3000II	2500W	12 minutes	N/A	6	N/A
Z-350	120V/700W, 240V/750W	4.5 minutes	N/A	13	N/A
Z-390	120V / 1000W, 240V / 1450W	1.5 minutes	N/A	4	YES
Z-1520	1516W	5 minutes	6 meters height	2.4	N/A

● OPTIONAL

MODEL	REMOTE CONTROL	DMX ON-BOARD	W-DMX ON-BOARD	TIMER REMOTE	WIRELESS REMOTE	CONTINUOUS OUTPUT
AF-3 / AF-3X	● Z-3	YES	N/A	N/A	● WTR-10	YES
AF-4 / AF-4R	● Z-3	YES	N/A	N/A	● WTR-20	YES
AF-5X / AF-5XR	N/A	YES	N/A	N/A	AF-5XR: WTR-10	YES
NEW!! AF-6	SC-2	YES	N/A	N/A	● WTR-20	YES
B-100	N/A	N/A	N/A	N/A	N/A	YES
B-200	N/A	YES	N/A	● BCT-1	● BCR-1	YES
CH-1	N/A	YES	● W-DMX-PCBR	N/A	N/A	YES
DNG-100	N/A	N/A	N/A	N/A	N/A	N/A
DNG-250	N/A	YES	N/A	N/A	N/A	YES
F-1	N/A	YES	● TIMO-W-DMX-PCBR ● TIMO-WTR-40	N/A	● WTR-10	YES
F-2	N/A	YES	N/A	N/A	N/A	YES
F-4	N/A	YES	● TIMO-W-DMX-PCBR	N/A	N/A	YES
F-7	N/A	YES	YES	N/A	N/A	YES
FT-20X	● Z-3	YES	N/A	N/A	● WTR-20	YES
FT-100	● Z-3	YES	N/A	N/A	W-2	YES
FT-200	● Z-3	YES	N/A	N/A	W-2	YES
HZ-100	N/A	N/A	N/A	● HC-1	● HCR-1	YES
HZ-350	N/A	YES	N/A	● HC-1	W-1	YES
HZ-400	N/A	YES	N/A	HC-1	● HCR-1	YES
HZ-500	N/A	YES	N/A	N/A	N/A	YES
HZ-1000	N/A	YES	● W-DMX-PCBR	N/A	N/A	YES
ICE-101	N/A	YES	N/A	Z-8	N/A	NO
IP-1500	N/A	YES	N/A	N/A	W-1	YES
LCU-1S	N/A	YES	N/A	N/A	N/A	N/A
LCU-2S	N/A	N/A	N/A	N/A	N/A	N/A
M-5	M-20	YES	N/A	M-20	● M-30PRO	YES
M-7X	N/A	YES	● TIMO-WTR-90	N/A	W-2	NO
M-8	M-21	YES	N/A	M-21	● M-31	NO
M-9	N/A	YES	● TIMO-WTR-90	N/A	W-2	NO
M-10	M-20	YES	N/A	M-20	● M-30PRO	YES
M-11	N/A	YES	● TIMO-W-DMX-PCBR ● TIMO-WTR-70	N/A	● WTR-20	YES
MB-1	N/A	N/A	N/A	● MCT-2	● MCR-1F	YES
MB-20X	● Z-3	YES	N/A	N/A	● WTR-20	YES
S-100X	SC-2	YES	N/A	N/A	N/A	YES
S-200X	SC-2	YES	N/A	N/A	N/A	YES
SW-250	● SC-2	YES	N/A	N/A	W-1	YES
SW-300	● SC-3	YES	N/A	N/A	W-1	YES
S-500	● SC-3	YES	● TIMO-W-DMX-PCBR ● TIMO-WTR-70	N/A	● WTR-20	YES
S-600	● SC-4	YES	● TIMO-WTR-90	N/A	W-2	YES
W-101	N/A	N/A	N/A	N/A	W-1	YES
W-508	N/A	N/A	N/A	N/A	W-1	YES
W-510	N/A	YES	N/A	N/A	W-1	NO
W-515D	N/A	YES	YES	N/A	W-1	YES
W-530D	N/A	YES	YES	N/A	W-1	YES
W-715	N/A	YES	N/A	N/A	W-1	NO
Z-800II	Z-10	N/A	N/A	● Z-40	● Z-50	YES
Z-1000II	Z-10	YES	N/A	● Z-40	● Z-50	NO
Z-1020	Z-10	YES	N/A	● Z-40	● Z-50	NO
Z-1200II	N/A	YES	N/A	Z-8	● Z-9	NO
Z-1500II	Z-20	YES	N/A	Z-20	● Z-30PRO	YES
Z-3000II	Z-20	YES	N/A	Z-20	● Z-30PRO	YES
Z-350	● Z-3	YES	N/A	N/A	N/A	YES
Z-390	● Z-3	YES	N/A	N/A	● WTR-20	YES
Z-1520	N/A	YES	N/A	N/A	W-2	NO

Antari
FOG MACHINE

Products are manufactured by Antari Lighting & Effects Ltd. : www.antari.com
For information requests please contact us at : sales@antari.com D08Z20220

